

SPECIFICATIONS

OUTDOOR

HOUSING

- Extruded aluminum housing
- Available in bronze or black powdercoat finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Built-in heat sinks

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 50°C (122°F)
- 89,000 hours @ L₇₀
- 2kV Surge Protection

OPTICAL SYSTEM

- Tempered clear flat glass lens
- 4100K
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI>80

MOUNTING

- Wall mount
- 8-16' mounting height

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- IP66 Rated
- DLC Approved
- BAA Compliant

WARRANTY

- 5 Year




OC1-CB
LED Up or Down
Wall Cylinder

ORDERING INFORMATION

CATALOG#	Direction	Wattage	Driver	Optics	CCT	Housing
OC1-CB	UL - Up Light	20L - 20W	QT	A - 70° Medium	41K	BZ - Bronze
	DL - Down Light			B - 100° Wide		BK - Black
				C - 30° Narrow		

OPTIONS (Factory Installed)


EM	- Emergency Battery
EMCW	- Cold Weather Emergency Battery (-20°C)
PC	- 120-277V Photocell
SGP	- Surge Protection
SGF	- Single Fuse
DBF	- Double Fuse
CC	- Custom Color

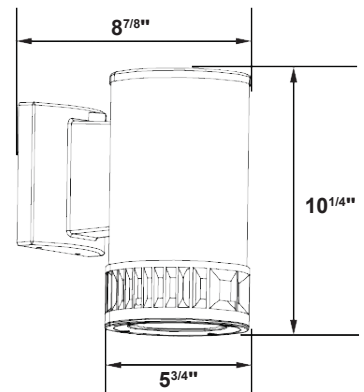


LUMEN INFORMATION

Catalog #	4100K		
OC1-CB	Medium (A)	Wide (B)	Narrow (C)
	2309 Lm	2364 Lm	2209 Lm
	21W	21W	21W


PHOTOMETRICS

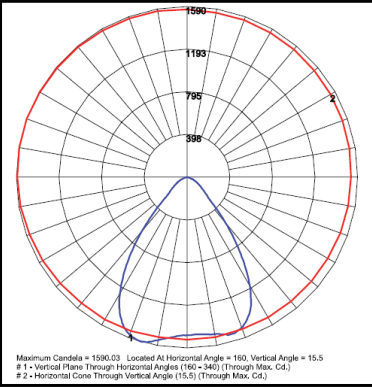

OC1-CB-20L-QT-A-41K

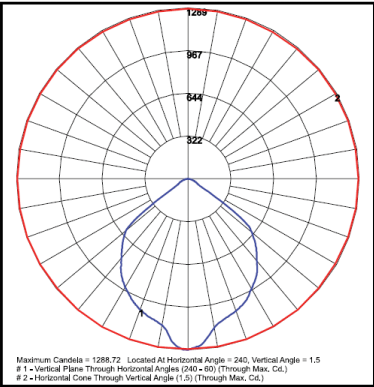

OC1-CB-20L-QT-B-41K

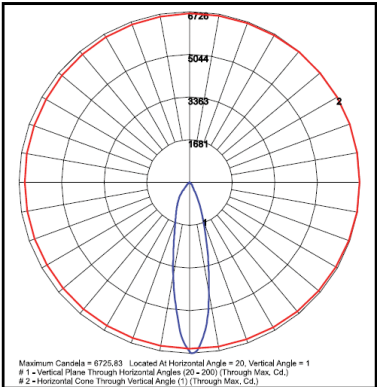

OC1-CB-20L-QT-C-41K