

SPECIFICATIONS

OUTDOOR

HOUSING

- Extruded aluminum housing
- Available in bronze or black powdercoat finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 50°C (122°F)
- 89,000 hours @ L₇₀
- 6kV Surge Protection
- THD <20%
- Power factor >.90

OPTICAL SYSTEM

- Tempered clear flat glass lens
- 4100K
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI>80

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- IP66 Rated
- DLC Approved
- BAA Compliant

WARRANTY

- 5 Year




OC2-CB LED Up and Down Wall Cylinder

ORDERING INFORMATION

CATALOG#	Wattage	Driver	Optics	CCT	Housing
OC2-CB	40L - 40W	QT 480V	A - 70° Up / 70° Down	41K	BZ - Bronze
			B - 100° Up / 100° Down		BK - Black
			C - 70° Up / 100° Down		
			D - 30° Up / 30° Down		
			E - 30° Up / 100° Down		
			F - 30° Up / 70° Down		
			G - 100° Up / 30° Down		
			H - 100° Up / 70° Down		
			I - 70° Up / 30° Down		

OPTIONS (Factory Installed)


EM	- Emergency Battery
EMCW	- Cold Weather Emergency Battery (-20°C)
PC	- 120-277V Photocell
SGP	- Surge Protection
SGF	- Single Fuse
DBF	- Double Fuse
CC	- Custom Color

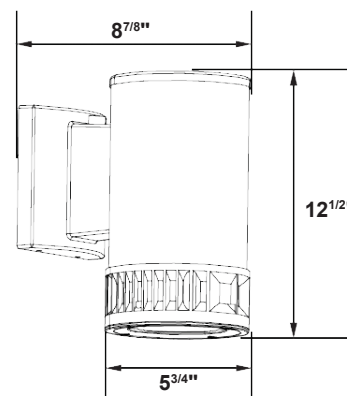


LUMEN INFORMATION

Catalog #	4100K		
OC2-CB	Medium (A)	Wide (B)	Narrow (C)
	4398 Lm	4577 Lm	4344 Lm
	40W	40W	40W


PHOTOMETRICS

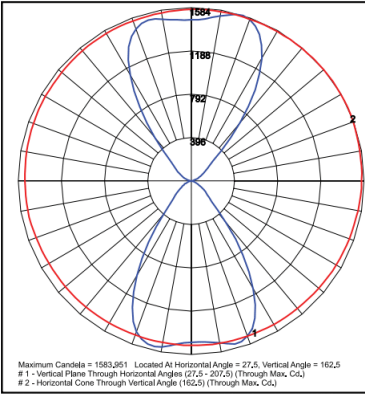

OC2-CB-40L-QT-A-41K

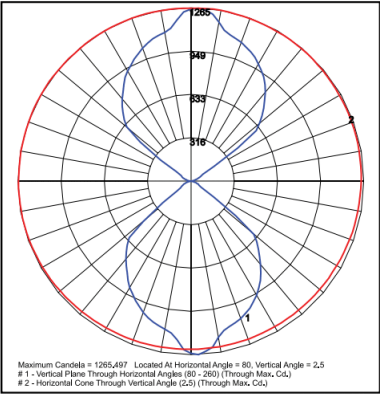

OC2-CB-40L-QT-B-41K

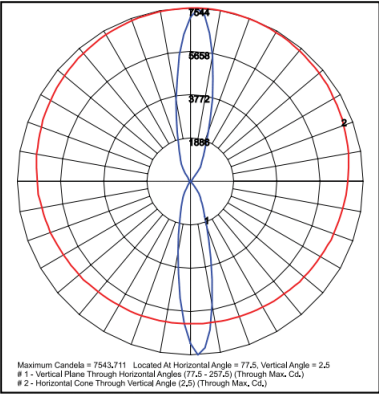

OC2-CB-40L-QT-C-41K