

## SPECIFICATIONS

MULTI-FAMILY

### HOUSING

- Die cast aluminum housing
- Bronze, black, or white powder coat finish
- Photocell included with on/off switch
- 1.5' cable whip included
- Available in 4" and 6" sizes

### ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable
- 6kV Surge Protection
- Power factor >.90
- THD<20%
- 50,000 hours @ L70
- Operating Temperature: -40°F - 122°F (-40°C - 50°C)

### OPTICAL SYSTEM

- Clear Glass Lens
- CRI > 80
- Can switch between Up Only, Down Only, or Up & Down Light
- MCT: Selectable between 3000K/4000K/5000K
- Beam angle: 40° standard

### MOUNTING

- Wall mount
- Mounts to a 3" or 4" jbox

### CODE COMPLIANCE

- cULus Listed for Wet Locations
- JA8 Title 24 Compliant
- FCC Compliant
- IP65

### WARRANTY

- 5 Year



## OC6-EN Wet Location LED Up/Down Light


## ORDERING INFORMATION

| CATALOG#           | Wattage     | Lumens             | CCT         |
|--------------------|-------------|--------------------|-------------|
| OC6-EN-1L-QT-MCT-* | 12W/16W/20W | 1260/1680/2100 Lms | 30K/40K/50K |
| OC6-EN-2L-QT-MCT-* | 22W/29W/35W | 2040/2720/3400 Lms | 30K/40K/50K |

\*Specify Color: **BK-Black**; **BZ-Bronze**; **WH-White**

### OPTIONS (Factory Installed)

|     |   |                |
|-----|---|----------------|
| 15D | - | 15° Beam Angle |
| 60D | - | 60° Beam Angle |

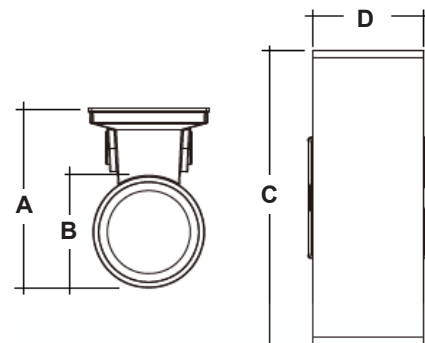

|    | A    | B    | C   | D     |
|----|------|------|-----|-------|
| 1L | 6.7" | 4.2" | 11" | 4.17" |
| 2L | 8.3" | 5.7" | 13" | 5.7"  |