

SPECIFICATIONS

MULTIFAMILY

HOUSING

- Die-Cast Aluminum Housing
- Available in Bronze, Brushed Nickel, Black, or White finish

ELECTRICAL

- 120V
- MT (120/277V) - R5 Models only
- TRIAC LED Dimmable (except for R5 models)
- Operating Temperature: -68°F - 104°F (-55°C - 40°C)
- 70,000 hours @ L₇₀

ILLUMINATION

- CRI>80
- MCT color temp (field selectable between 3000K, 4000K, 5000K)
- Beam Angle: 45°

MOUNTING

- Wall Mount

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- IP44 Rated
- IP65 Rated

WARRANTY

- 5 Year



OC8 Up/Down Cylinder


ORDERING INFORMATION

CATALOG #	Direction	Wattage	Lumens		Diam. x L x D
Round					
OC8-R1-DL-15L-120V-MCT-*	Down Light	15W	1200 Lumens	IP65	4" X 8" X 5 ³ / ₄ "
OC8-R1-UD-30L-120V-MCT-*	Up/Down Light	30W	2400 Lumens	IP65	4" X 12" X 5 ³ / ₄ "
OC8-R2-DL-6L-120V-MCT-*	Down Light	6W	400 Lumens	IP65	2 ² / ₅ " X 6 ¹ / ₄ " X 3 ² / ₅ "
OC8-R2-UD-12L-120V-MCT-*	Up/Down Light	12W	800 Lumens	IP65	2 ² / ₅ " X 10" X 3 ² / ₅ "
OC8-R3-DL-9L-120V-MCT-*	Down Light	9W	650 Lumens	IP65	3" X 6" X 5 ³ / ₄ "
OC8-R3-UD-18L-120V-MCT-*	Up/Down Light	18W	1300 Lumens	IP65	3" X 10" X 5 ³ / ₄ "
OC8-R4-DL40L-120V-MCT-*	Down Light	40W	3200 Lumens	IP44	8" X 10" X 8"
OC8-R4-UD-40L-120V-MCT-*	Up/Down Light	40W	3200 Lumens	IP44	8" X 10" X 8"
OC8-R5-DL20L-MT-MCT-*	Down Light	20W	1600 Lumens	IP44	5 ³ / ₄ " X 8" X 8 ¹ / ₃ "
OC8-R5-UD-40L-MT-MCT-*	Up/Down Light	40W	3200 Lumens	IP44	5 ³ / ₄ " X 17 ³ / ₄ " X 8 ¹ / ₄ "
Square					
OC8-S1-DL-20L-MT-MCT-*	Down Light	20W	960 Lumens	IP65	4 ³ / ₄ " X 8 X 7 ¹ / ₄ "
OC8-S1-UD-40L-MT-MCT-*	Up/Down Light	40W	1920 Lumens	IP65	4 ³ / ₄ " X 12" X 7 ¹ / ₄ "
OC8-S3-DL-12L-120V-MCT-*	Down Light	12W	960 Lumens	IP44	3 ¹ / ₂ " X 10 ¹ / ₄ " X 5 ⁷ / ₈ "
OC8-S3-UD-24L-120V-MCT-*	Up/Down Light	24W	1920 Lumens	IP44	3 ¹ / ₂ " X 10 ¹ / ₄ " X 5 ⁷ / ₈ "


*Specify Housing: **WHT**-White, **BLK**-Black, **BRZ**-Bronze, **BRN**-Brushed Nickel

OPTIONS


- PC1** - 120-277V Photocell
- EM** - Integral Battery Backup (R1, R4, S1, S3 models)

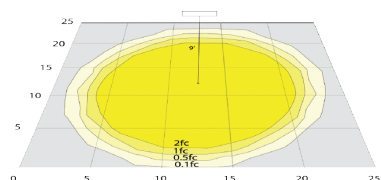


OC8-R1-UD (5000K, 25' x 25', Mounting Height: 9')

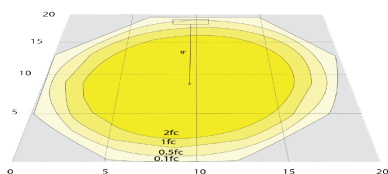


OC8-R1-DL (5000K, 20' x 20', Mounting Height: 9')

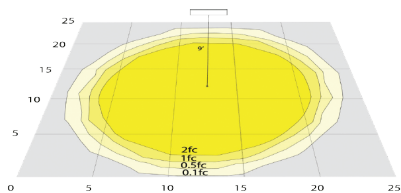


OC8-R2-UD (5000K, 25' x 25', Mounting Height: 9')

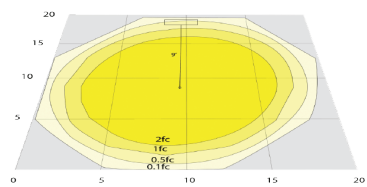


OC8-R2-DL (5000K, 20' x 20', Mounting Height: 9')

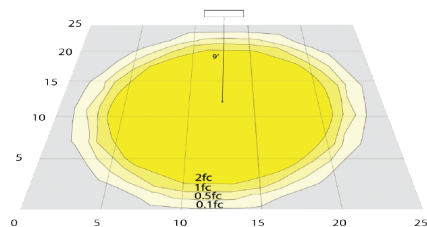


OC8-R3-UD (5000K, 25' x 25', Mounting Height: 9')

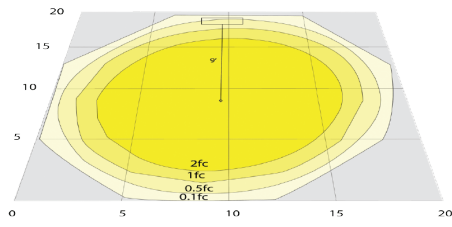


OC8-R3-DL (5000K, 20' x 20', Mounting Height: 9')

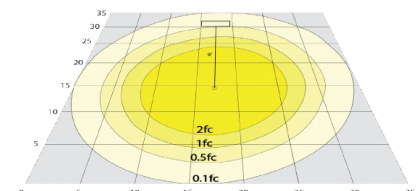


OC8-R4-UD (5000K, 35' x 35', Mounting Height: 9')

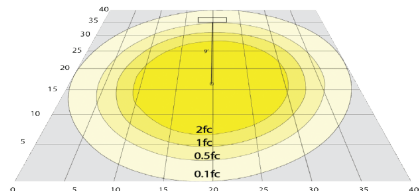


OC8-R3-DL (5000K, 40' x 40', Mounting Height: 9')

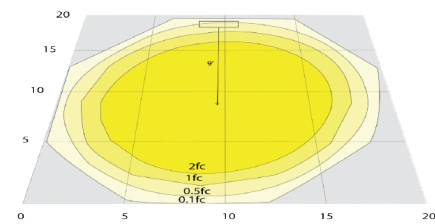


OC8-R5-UD (5000K, 20' x 20', Mounting Height: 9')

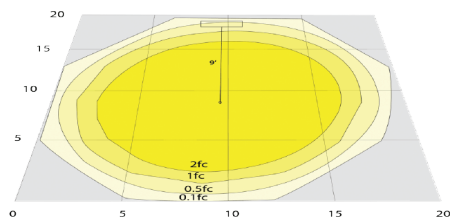


OC8-R3-DL (5000K, 20' x 20', Mounting Height: 9')

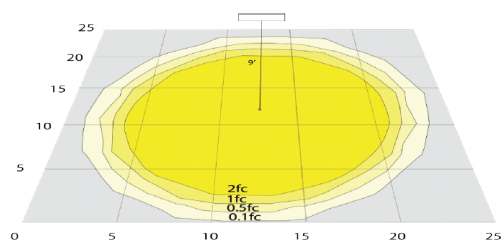


OC8-S3-UD (5000K, 25' x 25', Mounting Height: 9')

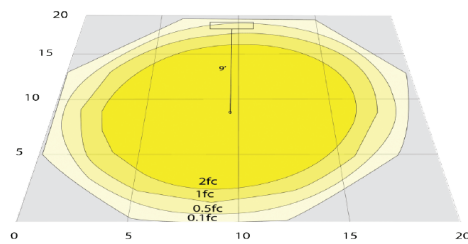

OC8-S3-DL (5000K, 20' x 20', Mounting Height: 9')

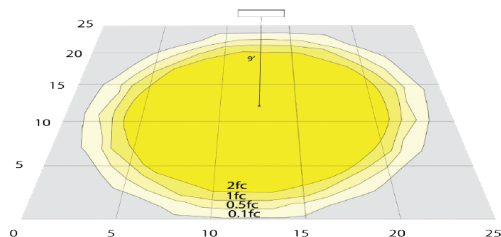

OC8-S1-DL (5000K, 25' x 25', Mounting Height: 9')

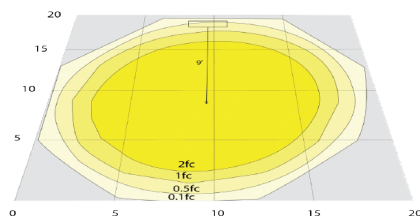

OC8-S1-DL (5000K, 20' x 20', Mounting Height: 9')