

SPECIFICATIONS

MULTI-FAMILY

HOUSING

- Spun steel housing
- Available in black, white, black/gold, white/silver
- 60" Power cord included

OPTICAL SYSTEM

- 25W, 1300 Lumens
- 5CT (27K/30K/35K/40K/50K) selectable
- Polycarbonate lens
- CRI $\geq$ 90
- 50,000 Hours @ L₇₀

ELECTRICAL

- 120V
- Dimmable driver standard
- Operating Temperature: -30°C (-22°F) - 40°C (104°F)

CODE COMPLIANCE

- cETLus Listed for Indoor Locations
- Meets UL Requirements

WARRANTY


- 1 Year





PND43-W
Pendant Light


ORDERING INFORMATION

CATALOG#	Wattage	Lumens	CCT
PND43-W-25L-120V-5CT-*	25W	1300 Lumens	27K/30K/35K/40K/50K
PND43-W-40L-120V-5CT-**	40W	2250 Lumens	27K/30K/35K/40K/50K
*Specify Housing: <u>WH</u> -White, <u>BK</u> -Black, <u>WS</u> -White/Silver, <u>BG</u> -Black/Gold			
**Specify Housing: <u>WS</u> -White/Silver, <u>BG</u> -Black/Gold			

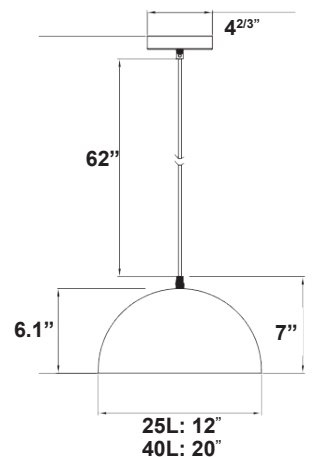



BUG Rating: B1-U1-G0

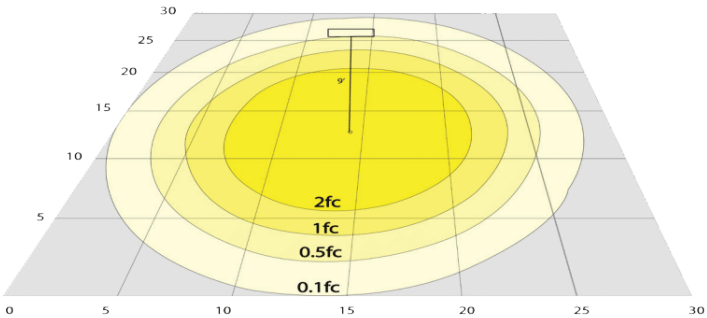

Area 30' x 30' Mounting Height: 9'