

SPECIFICATIONS

MULTI-FAMILY

HOUSING

- Laminated southern yellow pine bollard body
- Protected against termites/insects, and moisture related issues
- Kiln-dried
- Multiple finishes available
- Alloy aluminum powder coated pendant
- Alloy aluminum top cap, arm, and window frames

ELECTRICAL

- 120V
- Dimmable
- Operating temperature: -20°C - 40°C (-4°F - 104°F)
- Medium Base

OPTICAL SYSTEM

- Multiple lens options
- MCT - Selectable between 2700K/3000K/3500K/4000K/5000K (not including 2L-120V-2K model)

MOUNTING

- Pendant mount

CODE COMPLIANCE


- cETLus Listed for Wet Locations
- Meets UL Requirements
- IP66 Rated
- Title 24
- RoHS Compliant
- BABA Compliant

WARRANTY

- 1 Year



PND75-Q Square Pendant Mounts

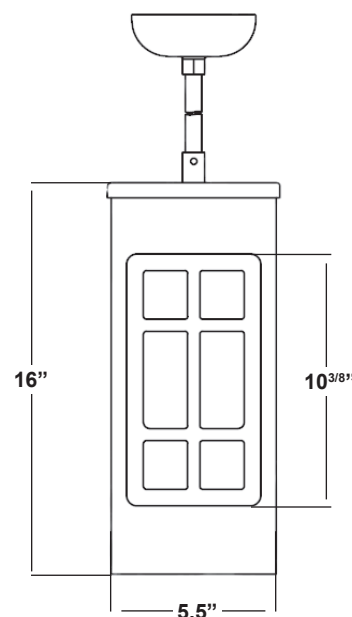

All window patterns are the same
overall height and width

ORDERING INFORMATION

MODEL #	Model	Window Pane	Lamping	Finish	Metal	Lens
PND75-Q	FT (Flat Top)	RO (Rectangular Open)	2L-120V-22K (80 Lms)	NS (No Stain)	BK (Black)	WA (White Acrylic)
	FTG (Flat Top w/Grooves)	RP (Rectangular Panes)	5L-120V-5CT (450 Lms)	BG (Beige Grey)	BZ (Bronze)	FP (Frosted Polycarbonate)
		OO (Oval Open)	8L-120V-5CT (1100 Lms)	CO (Coastal)	DBZ (Dark Bronze)	
		OP (Oval Panes)	12L-120V-5CT (1600 Lms)	BM (Bamboo)	WH (White)	
		DO (Diamond Open)	14L-120V-5CT (800 Lms)	RW (Riverwood)	GN (Green)	
		DP (Diamond Panes)		HC (Hill Country)	SV (Silver)	
				CC (Custom Color)	GY (Light Grey)	
					CC (Custom Color)	

OPTIONS (Factory Installed)

PC - Photocell