

SPECIFICATIONS

MULTI-FAMILY

HOUSING

- Steel Housing
- 3", 4", or 6" Sizes
- Black or White finishes available
- Surface, Stem, or Cord Mount
- Push in/pull out reflector
- 3 Step MacAdam Ellipses

OPTICAL SYSTEM

- Clear polycarbonate lens
- Beam angle adjustable: 3": 25-80°, 4 & 6": 35 - 60°
- 5CT: 2700K/3000K/3500K/4000K/5000K

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimming
- Pf >.90
- THD<20%
- Built in 2.5kV Surge Protector
- Operating Temperature: -40°F - 114°F (-40°C - 45°C)
- 70,000 hours @ L₇₀

MOUNTING

- Surface mount into 3O or 4O Jbox
- Stem/Cord or Cord Mount

CODE COMPLIANCE



- cETLus Listed for Damp Locations
- Energy Star Certified
- CA Title 24
- FCC Compliant

WARRANTY

- 5 Year



PND80 Cylinder Downlight

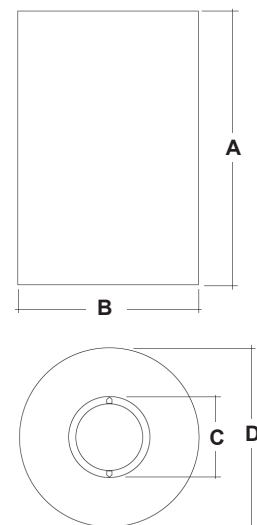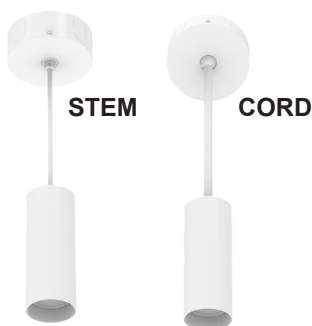

ORDERING INFORMATION

CATALOG#	Size	Wattage	Lumens	Mount
PND80-EN-3-1L-QT-5CT-SM-*	3"	5W/10W/15W	500/ 950/ 1400 Lms	Surface
PND80-EN-4-1L-QT-5CT-SM-*	4"	5W/10W/15W	500/ 950/ 1400 Lms	Surface
PND80-EN-4-2L-QT-5CT-SM-*	4"	10W/20W/25W	1000/ 2000/ 2500 Lms	Surface
PND80-EN-6-1L-QT-5CT-SM-*	6"	10W/20W/25W	1000/ 2000/ 2500 Lms	Surface
PND80-EN-6-2L-QT-5CT-SM-*	6"	30W/35W/40W	3000/ 3500/ 4000 Lms	Surface

*Specify Color: **WH**-White, **BK**-Black

ACCESSORIES (Factory Installed)

PND80-EN-SMC-*	- 0.75" Surface Mount Canopy for 3O and 4O Jboxes
PND80-EN-SMC2-*	- Surface Mount Canopy for 2.3" Jbox
PND80-EN-SMC2-EM-*	- 2.3" Surface Mount Canopy with EM installed
PND80-EN-PMC-*	- 0.75" Pendant Mount Canopy (Must purchase cord)
PND80-EN-PMC2-*	- Pendant Mount Canopy for 2.3" Jbox
PND80-EN-PMC2-EM-*	- 2.3" Pendant Mount Canopy with EM installed
PND80-EN-ST1-*	- Stem Mount
SJT-18-5-7FT-*	- 7' Cord
SJT-18-5-12FT-*	- 12' Cord

*Specify Color: **WH**-White, **BK**-Black

	A	B	C	D
3"	8.5"	3.25"	2.6"	3.25"
4"	9"	4.5"	2.6"	4.5"
6"	10"	6"	2.6"	4.5"