

SPECIFICATIONS

OUTDOOR

HOUSING

- Cast aluminum fitter

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Operating Temperature: -40°C (-40°F) - 40°C (104°F)

OPTICAL SYSTEM

- Thermal Protection
- 50,000 Hours @ L₇₀
- Power Factor >.90
- 4000K standard
- 3000K and 5000K optional

CODE COMPLIANCE

- cULus Listed for Wet Locations
- Made in USA
- RoHS Compliant

WARRANTY

- 5 Year



PT12-G-T

PT12-G-D

PT12-G LED Post Top

ORDERING INFORMATION


CATALOG #	Wattage	Lumens
PT12-G-D1-40L-QT-40K-*#	40W	4,000 Lumens
PT12-G-D1-60L-QT-40K-*#	60W	6,000 Lumens
PT12-G-D1-MOG-*#	Mogul Base	
PT12-G-D1-MED-*#	Medium Base	
PT12-G-D2-40L-QT-40K-*#	40W	4,000 Lumens
PT12-G-D2-60L-QT-40K-*#	60W	6,000 Lumens
PT12-G-D2-MOG-*#	Mogul Base	
PT12-G-D2-MED-*#	Medium Base	
PT12-G-T1-40L-QT-40K-*#	40W	4,000 Lumens
PT12-G-T1-60L-QT-40K-*#	60W	6,000 Lumens
PT12-G-T1-MOG-*#	Mogul Base	
PT12-G-T1-MED-*#	Medium Base	
PT12-G-T2-40L-QT-40K-*#	40W	4,000 Lumens
PT12-G-T2-60L-QT-40K-*#	60W	6,000 Lumens
PT12-G-T2-MOG-*#	Mogul Base	
PT12-G-T2-MED-*#	Medium Base	
*Specify Body: BL ack; WH ite; BR onze		
#Specify Lens: PCL -Clear Polycarbonate		
WAL -White Acrylic, CAL -Clear Acrylic, FAL -Frosted Acrylic		

OPTIONS (Factory Installed)

- 30K - 3000K (special order)
- 50K - 5000K (special order)
- T3 - Type III (special order. T5 is standard)


ACCESSORIES (Order Separately, Ships on Side)

- PT12-G-FIN - Plastic Finial Topper
- LLP24W-E26-G - E26 24W Lamp
- LLP24W-E39-G - E39 24W Lamp
- LLP54W-E26-G - E26 54W Lamp
- LLP54W-E39-G - E39 54W Lamp

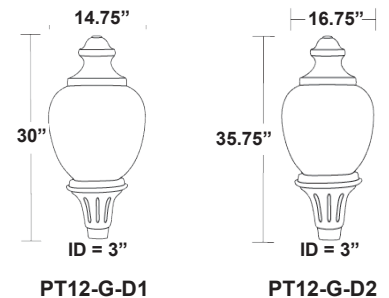

PT12-G-D1

PT12-G-D2

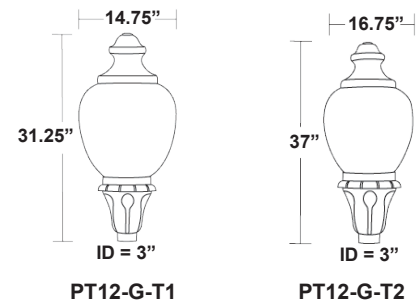

PT12-G-T1

PT12-G-T2