

SPECIFICATIONS

MULTI FAMILY

HOUSING

- Fade and rust resistant composite construction
- Fits 3" diameter post

ELECTRICAL

- 120Vac
- Operating Temperature: -40°C(-40°F) - 40°C (104°F)
- Dimmable

OPTICAL SYSTEM

- Frosted acrylic lens
- 50,000 Hours @ L₇₀
- CRI > 80

CODE COMPLIANCE

- cULus Listed for Wet Locations
- BAA Compliant


WARRANTY

- 5 Year




PT3-G-LED LED Post Top

PT3-G-1

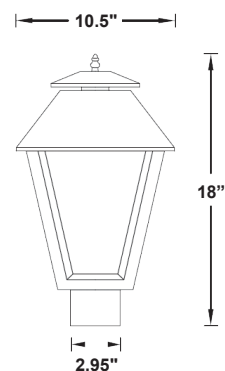

PT3-G-2

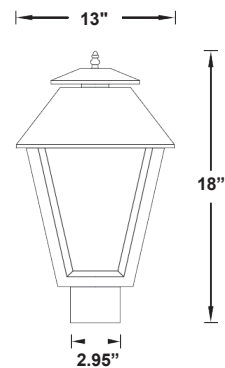

ORDERING INFORMATION

MODEL	Wattage	Driver	CCT	Color
PT3-G-1	13L (13W, 1200 Lms)	120V	30K*	WH (White)
PT3-G-2	14L (14W, 1450 Lms)		40K*	BK (Black)
	22L (22W, 2000 Lms)			

60W (60W Incandescent Max, Medium)

*Dedicated LED for L models, screw in LED Lamp for 60W model

*If no lamping required for 60W model, leave CCT blank

OPTION

FIN - Brass Finial