

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing
- Black powdercoat bronze finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- Photocell adaptable

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 0-10V Dimmable driver available

OPTICAL SYSTEM

- Clear and Opal glass lenses available
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- Type III, and Type V distribution

ILLUMINATION

- 100W LED / 108 System Watts
- 176W LED / 190 System Watts

MOUNTING

- Accommodates 2^{7/8}" OD x 3" Tenons

CODE COMPLIANCE

- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP66 Rated
- Meets DLC Requirements

WARRANTY

- 5 Year
- 10 Year Available



PT5-Q LED Large Round Post Top


CATALOG #	Lumens	Color	Distribution	Lens
PT5-Q-100L-QT-40K-T3-CL	7,661	4000K	Type III	Clear
PT5-Q-100L-QT-40K-T3-OL	6,588	4000K	Type III	Opal
PT5-Q-100L-QT-40K-T5-CL	7,664	4000K	Type V	Clear
PT5-Q-100L-QT-40K-T5-OL	6,591	4000K	Type V	Opal
PT5-Q-100L-QT-50K-T3-CL	7,959	5000K	Type III	Clear
PT5-Q-100L-QT-50K-T3-OL	6,836	5000K	Type III	Opal
PT5-Q-100L-QT-50K-T5-CL	7,962	5000K	Type V	Clear
PT5-Q-100L-QT-50K-T5-OL	6,847	5000K	Type V	Opal
PT5-Q-176L-QT-30K-T5-CL	18,253	3000K	Type V	Clear
PT5-Q-176L-QT-30K-T5-OL	15,978	3000K	Type V	Opal
PT5-Q-176L-QT-40K-T5-CL	18,818	4000K	Type V	Clear
PT5-Q-176L-QT-40K-T5-OL	16,089	4000K	Type V	Opal
PT5-Q-176L-QT-50K-T5-CL	19,174	5000K	Type V	Clear
PT5-Q-176L-QT-50K-T5-OL	16,394	5000K	Type V	Opal

OPTIONS (Factory Installed)


480V	-	480V (replaces QT)
SGF	-	Single Fusing
DBF	-	Double Fusing
SGP	-	Surge Protection
OCS	-	Internal Microwave Sensor with Dimming For Mounting Heights 8'-40'; 120-277V only
TWLPC3R	-	3-Pin Twist Lock Photocell Receptacle
TWL7PIN	-	7-Pin Twist Lock Photocell Receptacle

ACCESSORIES (Order Separately, Ships on Side)


TWLPC1	-	110-120V Twist Lock Photocell
TWLPC2	-	105-287V Twist Lock Photocell
TWLTD1	-	120V Twist Lock Time Delay PC
TWLTD2	-	277V Twist Lock Time Delay PC
TWLNSC	-	Twist Lock Non-Shorting Cap (Fixture always off)
TWLSC	-	Twist Lock Non-Shorting Cap (Fixture always on)

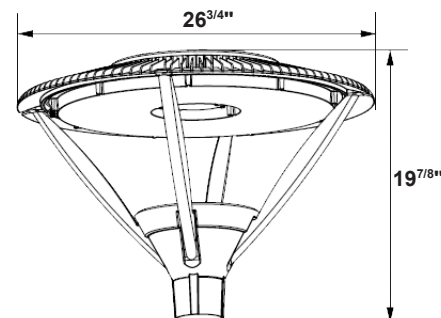

PHOTOMETRICS

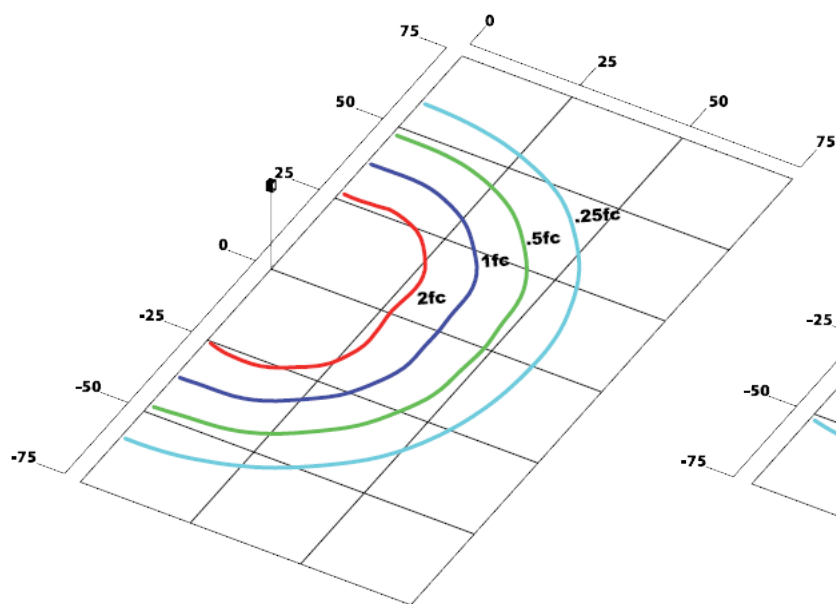

PT5-Q-176L-QT-50K-T5-CL
Mounting Height = 25ft

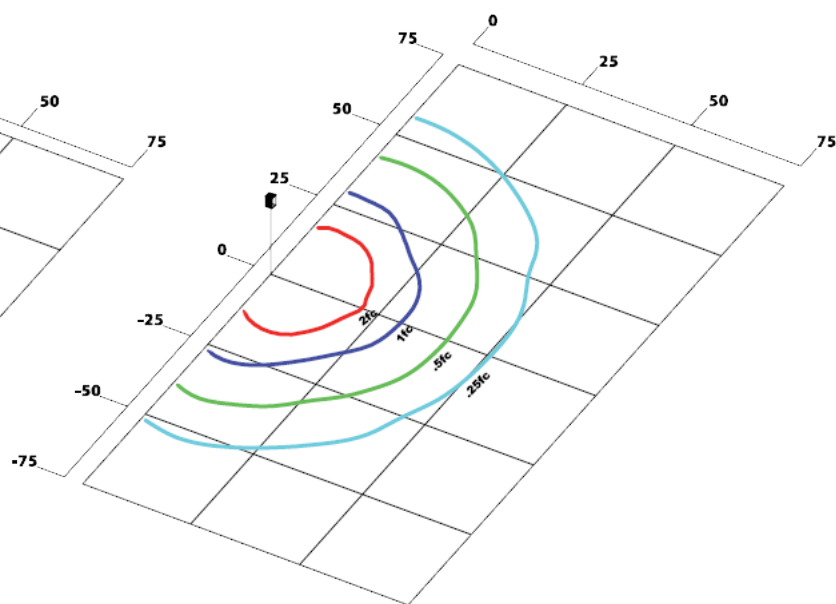

PT5-Q-100L-QT-50K-T3-CL
Mounting Height = 25ft