

SPECIFICATIONS

MULTI-FAMILY

HOUSING

- Available in LED, Incandescent, and GU24
- Fade and rust resistant
- Fits most 3" diameter posts

ELECTRICAL

- 120V
- Operating Temperature: -40°C (-40°F) - 40°C (104°F)
- Dimmable Driver standard (LED)

OPTICAL SYSTEM

- Thermal Protection
- 50,000 Hours @ L₇₀

CODE COMPLIANCE

- cULus Listed for Wet Locations
- Made in USA
- RoHS Compliant

WARRANTY

- 5 Year



PT7-G-1

PT7-G-2

PT7-G LED Post Top


ORDERING INFORMATION

CATALOG #	Wattage	Lumens
PT7-G-1-13L-120V-30K-*#	13W	1140 Lumens
PT7-G-2-13L-120V-30K-*#	13W	1140 Lumens
PT7-G-1-13L-120V-40K-*#	13W	1280 Lumens
PT7-G-2-13L-120V-40K-*#	13W	1280 Lumens
PT7-G-1-14L-120V-30K-*#	14W	1430 Lumens
PT7-G-2-14L-120V-30K-*#	14W	1430 Lumens
PT7-G-1-14L-120V-40K-*#	14W	1500 Lumens
PT7-G-2-14L-120V-40K-*#	14W	1500 Lumens
PT7-G-1-22L-120V-30K-*#	22W	1950 Lumens
PT7-G-2-22L-120V-30K-*#	22W	1950 Lumens
PT7-G-1-22L-120V-40K-*#	22W	2130 Lumens
PT7-G-2-22L-120V-40K-*#	22W	2130 Lumens
PT7-G-1-150W-120V-*#	Medium Base, 150W Max	
PT7-G-2-150W-120V-*#	Medium Base, 150W Max	
PT7-G-1-13W-120V-*#	13W GU24 Base	
PT7-G-2-13W-120V-*#	13W GU24 Base	
PT7-G-1-18W-120V-*#	18W GU24 Base	
PT7-G-2-18W-120V-*#	18W GU24 Base	
PT7-G-1-27W-120V-*#	27W GU24 Base	
PT7-G-2-27W-120V-*#	27W GU24 Base	


*Specify Diffuser: **CAL**-Clear Acrylic; **CPL**-Clear Polycarbonate; **WHP**-White Polyethylene
 #Specify Housing: **WH**-White; **BL**-Black

ACCESSORIES (Order Separately, Ships on Side)

A1930K	-	A19 Lamp, 3000K (used with 50W model)
A1940K	-	A19 Lamp, 4000K (used with 50W model)
CFL24K	-	CFL Lamp, 2700K (used with 13W, 18W, 27W models)

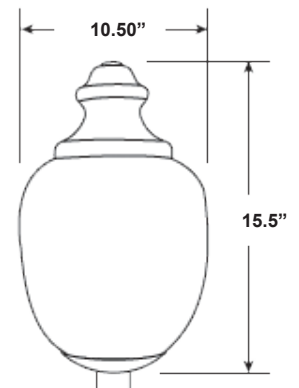

PT7-G-1

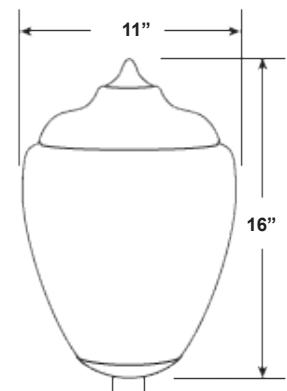

PT7-G-2