

SPECIFICATIONS

OUTDOOR

HOUSING

- Brass housing
- Weathered Brass finish

ELECTRICAL

- 12V

OPTICAL SYSTEM

- Clear, convex, heat resistant, tempered glass lens
- 3W
- G4 Base
- 3000K or 6400K

MOUNTING

- 1/2" NPT
- Ground spike included for installation

CODE COMPLIANCE


- ETL Listed

WARRANTY

- 5 Year



PTHLD1-DM Adjustable Pathway Light

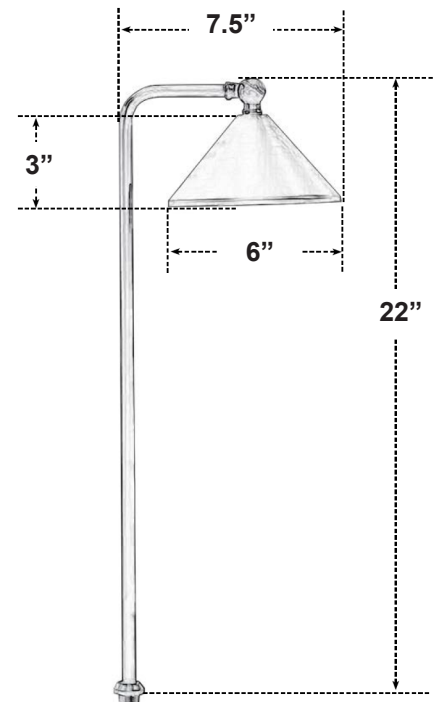

ORDERING INFORMATION

MODEL#	Wattage	Driver	CCT
PTHLD1-DM-3L-12V-30K	3W	12V	3000K
PTHLD1-DM-3L-12V-64K	3W	12V	6400K