

SPECIFICATIONS

MULTI FAMILY

HOUSING

- Durable non-corrosive UV resistant resin
- Wall Mount

ELECTRICAL

- 120VAC
- Operating Temperature: -40°C(-40°F) - 40°C (104°F)
- Dimmable

OPTICAL SYSTEM

- Clear acrylic lens
- 50,000 Hours @ L₇₀
- CRI > 80

CODE COMPLIANCE

- cULus Listed for Wet Locations
- BAA Compliant

WARRANTY

- 5 Year





PTW12-1



PTW12-2

PTW12-G Wall Mount Fixture

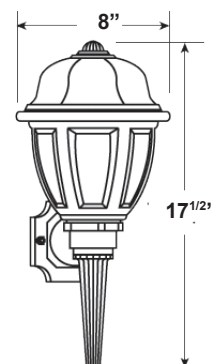

ORDERING INFORMATION

MODEL#	Wattage	Driver	CCT	Color
PTW12-1-G	13L (13W, 1200 Lms)	120V	30K*	BK
PTW12-2-G	60W (60W Max. Medium Base)		40K*	WH

**Dedicated LED for 13L model, screw in LED Lamp for 60W model*
**If no lamping required for 60W model, leave CCT blank*

OPTIONS (Factory Installed)

- PC - Photocell
- OCS - Motion Sensor and Photocell