

SPECIFICATIONS

MULTI FAMILY

HOUSING

- Cast Aluminum Cage
- Wall Mount

ELECTRICAL

- 120/277V
- Also available in 347/480V
- Dimmable 0-10V
- Standard Surge Protection included (6kV Line-Line; 10kV Line-Earth)

OPTICAL SYSTEM

- Color Temp: 3000K-5000K
- Distribution Type: T1, TII, TIII, TIV, TV

CODE COMPLIANCE

- IP66 Rated
- ETL Listed
- BABA Compliant

WARRANTY

- 5 Year warranty



PTW25-Q
LED Wall Mount

ORDERING INFORMATION


CATALOG#	Wattage	Driver	Color	Lens	Distribution
PTW25-Q	10L	QT (120-277V)	3K	CAL (Clear Acrylic)	T1*
	15L	480V (347-480V)	4K	CPL (Clear Polycarbonate)	T2
	20L		5K	FAL (Frosted Acrylic)	T3
	30L			FPL (Frosted Polycarbonate)	T4
	40L			WAL (White (Opal) Acrylic)	T5
	50L			PAL (Pattern Acrylic)	
	60L			DAL (Seeded Acrylic)	

**70W and above only*

OPTIONS*

BK	- Black
DBZ	- Dark Bronze
WH	- White
GN	- Green
SL	- Silver Metallic
GY	- Light Gray
TBK	- Textured Black
CC	- Custom Color (Consult Factory)

***Bronze standard**

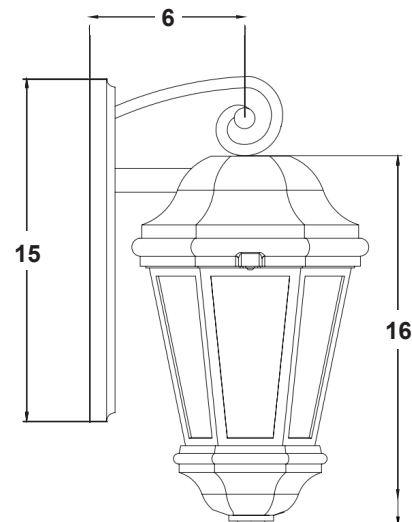

LUMEN INFORMATION

Wattage (Catalog Logic)		10w (10W)	15w (15W)	20w (20W)	30w (30W)	40w (40W)	50w (50W)	60w (60W)
Radiant Size (DIA.)		6"	6"	6"	6"	8"	8"	8"
Input Watts		10.2	14.6	20.4	30.6	40.8	51.0	56.6
Optic		CCT	Delivered Lumens					
2 = Type II Clear, Frosted, or Ribbed Lens	3K	1,344	1,763	2,352	3,527	4,703	5,878	7,055
	4K	1,371	1,800	2,400	3,600	4,800	6,001	7,200
	5K	1,392	1,828	2,437	3,655	4,874	6,091	7,310
	BUG Rating	B0-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G1	B1-U3-G1	B2-U3-G2
3 = Type III Clear, Frosted, or Ribbed Lens	3K	1,342	1,760	2,348	3,521	4,695	5,869	7,043
	4K	1,369	1,797	2,396	3,595	4,792	5,991	7,188
	5K	1,390	1,825	2,433	3,649	4,866	6,081	7,298
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B2-U3-G2	B2-U3-G2	B2-U3-G2
4 = Type IV Clear, Frosted, or Ribbed Lens	3K	1,312	1,721	2,296	3,443	4,591	5,739	6,887
	4K	1,339	1,758	2,343	3,515	4,686	5,858	7,029
	5K	1,359	1,784	2,379	3,569	4,758	5,947	7,136
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G2	B2-U3-G2	B2-U3-G2
5 = Type V Clear, Frosted, or Ribbed Lens	3K	1,373	1,801	2,402	3,603	4,804	6,005	7,207
	4K	1,401	1,839	2,452	3,678	4,903	6,130	7,355
	5K	1,423	1,867	2,489	3,734	4,979	6,222	7,467
	BUG Rating	B1-U2-G1	B1-U2-G1	B2-U2-G1	B2-U2-G1	B3-U3-G1	B3-U3-G1	B3-U3-G2
5 = Type V with White-Opal Lens	3K	964	1,446	1,928	2,893	3,857	4,821	5,785
	4K	984	1,477	1,969	2,953	3,937	4,921	5,906
	5K	999	1,499	1,998	2,998	3,997	4,997	5,996
	BUG Rating	B1-U3-G1	B1-U3-G1	B1-U3-G2	B1-U4-G2	B1-U4-G2	B2-U4-G3	B2-U5-G3

Please refer to the fixture's IES file for detailed information. Subject to change.