

SPECIFICATIONS

INDOOR

HOUSING

- Die-Cast Aluminum housing
- Spring clips with JBox elimantes can
- 6W and 8W housings: 2^{5/8}"H x 3^{1/8}"Ø
- 12W and 15W housings: 3^{3/8}"H x 3^{1/8}"Ø

ELECTRICAL

- 120V
- Operating Temperature: -17°C(0°F) - 45°C(113°F)

ILLUMINATION

- Available in single CCT, Color Selectable (5CT-27K/30K/40K/50K) or dimmable between 18K through 30K (CCD)
- 50,000 Hours @ L₇₀
- CRI: 90

MOUNTING


- Canless installation
- Tension spring clips clam into 1/2" - 1/5" ceiling
- Mounting plate also available

CODE COMPLIANCE

- cETLus Listed for Indoor Locations
- Meets UL Requirements
- Energy Star Certified
- CEC Title 24 Listed

WARRANTY

- 5 Year warranty

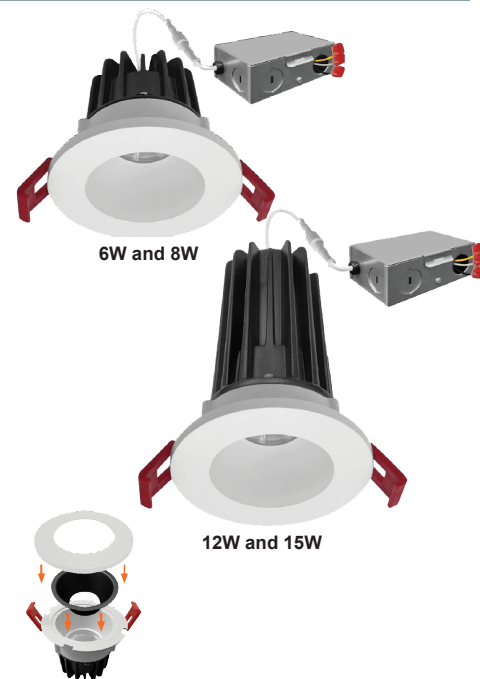

RCAN2-EN 2" SnapTrim Downlight

ORDERING INFORMATION

MODEL#	Wattage/Lumens	Voltage	Color	Trim
RCAN2-EN	6L (6W, 450Lm)	120V	27K	WHS (White Smooth)
	8L (8W, 600Lm)		30K	WHB (White Baffle)
	12L (12W, 850Lm)		40K	BRS (Bronze Smooth)
	15L (15W, 1000Lm)		50K	BRB (Bronze Baffle)
			CCD	BLS (Black Smooth)
			5CT	BLB (Black Baffle)
				BNS (Brushed Nickel Smooth)
				CHS (Chrome Smooth)
				BNQ (Brushed Nickel Square)
				BLQ (Black Square)
		BRQ (Bronze Square)		
		WHQ (White Square)		

OPTIONS (Factory Installed)

- EM - 25W Emergency Battery
- WF - WiFi Control

ACCESSORIES (Order Separately)

- RCAN2-EN-MP - Universal Mounting Plate
- RCAN2-EN-EC6 - 6" Extension Cable
- RCAN2-EN-EC10 - 10" Extension Cable