

SPECIFICATIONS

MULTI-FAMILY

HOUSING

- White metal housing and trim
- Round Housing: 90° tilt with 360° rotation
- 3 step MacAdam Ellipses
- 2 hour fire rating

OPTICAL SYSTEM

- Clear COB Lens
- 5CT: Selectable between 2700K/3000K/3500K/4000K/5000K
- Beam angle: 38° standard, other options available
- CRI>90

ELECTRICAL

- 120V
- Triac Dimmable
- 50,000 hours @ L₇₀
- Operating temperature: -40°F - 114°F (-40°C - 45°C)
- 2.5kV Surge Protection

MOUNTING


- Spring clips with remote j-box
- Optional new construction plate
- Tension clips mount into 1/2" - 1 1/2" thick ceiling
- Pre-wired junction box with circuit wiring built in

CODE COMPLIANCE

- cETLus Listed for Damp Locations
- Energy Star Certified
- Title24 Compliant
- IP54 Rated
- FCC Compliant

WARRANTY

- 5 Year

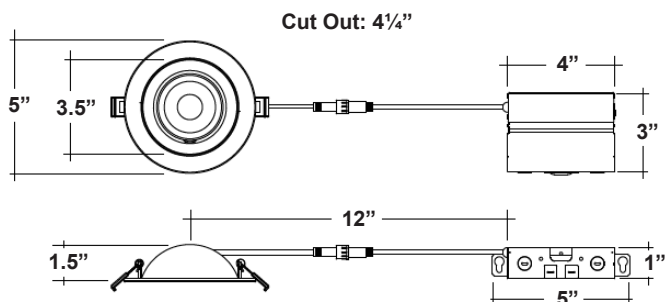

RCAN4-FR-EN 4" Fire Rated Snap-Trim Floating Gimbal

ORDERING INFORMATION

CATALOG#	Wattage	Lumens
RCAN4-FR-EN-9L-120V-5CT	9W	700 Lumens

OPTIONS (Factory Installed)

EM	- Emergency Backup
24D	- 24 Degree Lens
60D	- 60 Degree Lens

ACCESSORIES (Order Separately, Ships on Side)

RCAN4-JBOX6	- 6" JBox Connector Extension Cable
RCAN4-JBOX10	- 10" JBox Connector Extension Cable
RCAN4-JBOX20	- 20" JBox Connector Extension Cable
RCAN4-EN-MTGP	- Universal Pre-Mounting Plate (new construction)