

SPECIFICATIONS

MULTI FAMILY

HOUSING

- Residential or commercial applications
- Metal housing
- Round housing standard (square trims available)
- White finish standard (other colors available)

ELECTRICAL

- 120V
- 120-277V
- TRIAC and ELV dimmable down to 5%
- Operating Temperature: -40°C - 45°C (-4°F - 114°F)
- 50,000 hours @ L₇₀

OPTICAL SYSTEM

- 5CT (Selectable between 27K/30K/35K/40K/50K)
- MCT (30-18K Warm Dimming)
- CRI>90
- 38° Beam angle standard (24° and 60° degree optional)

MOUNTING

- Does not fit into a recessed can
- No housing needed in remodel applications
- Can be removed from below ceiling for service
- Pre-wired junction box with circuit wiring built-in (3in/3out)
- Tension clips mount into 1/2" to 1 1/2" thick ceiling
- Optional new construction plate available

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- CEC Title24 Compliant
- Energy Star Rated
- FCC Compliant


WARRANTY

- 5 Year

ORDERING INFORMATION

CATALOG #	Description
RDL1-EN-7L-120V-5CT	1" 7W, 550 Lm, 120V, 27K/30K/35K/40K/50K
RDL3-EN-15W-120V-5CT	2 ²⁵ / ₈ ", 15W, 1000 Lm, 120V, 27K/30K/35K/40K/50K
RDL4-EN-12W-120V-MCT	3", 12W, 850 Lm, 120V, 30-18K Warm Dimming
RDL4-EN-15W-120V-5CT	3", 15W, 1100 Lm, 120V, 27K/30K/35K/40K/50K
RDL4-EN-15W-QT-5CT	3", 15W, 1100 Lm, 120-277V, 27K/30K/35K/40K/50K
RDL4-EN-18W-120V-5CT	3", 18W, 1500 Lm, 120V, 27K/30K/35K/40K/50K
RDL6-EN-24W-120V-5CT	3 ³ / ₈ ", 24W, 1800 Lm, 120V, 27K/30K/35K/40K/50K

Options/Accessories on 2nd Page

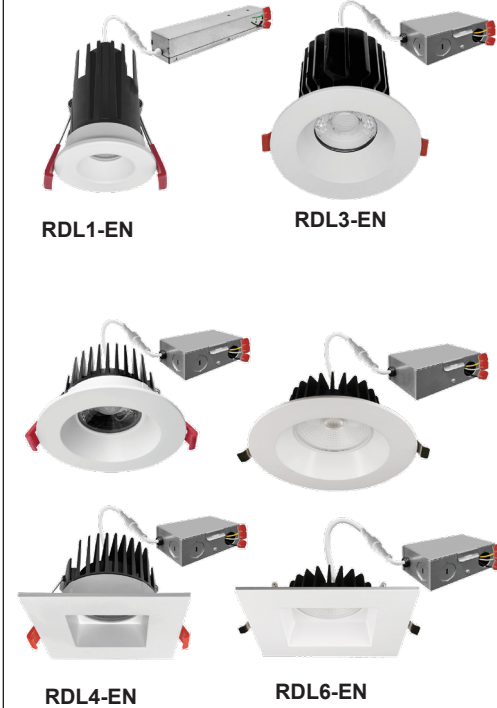

RDL-EN
Color Selectable
Downlight

OPTIONS / ACCESSORIES

Options (Factory Installed)

EM	- Emergency Battery Backup
24D	- 24° Beam Angle (standard 38°)
60D	- 60° Beam Angle (standard 38°)

Accessories (Order Separately)


RDL1-EN-WHS	- White Square Trim (RDL1)
RDL1-EN-BKS	- Black Square Trim (RDL1)
RDL1-EN-BKR	- Black Round Trim (RDL1)
RDL3-EN-WHS	- White Square Trim (RDL3)
RDL3-EN-BKS	- Black Square Trim (RDL3)
RDL3-EN-BKR	- Black Round Trim (RDL3)
RDL4-EN-WHS	- White Square Trim (RDL4)
RDL4-EN-BKS	- Black Square Trim (RDL4)
RDL4-EN-BKR	- Black Round Trim (RDL4)
RDL4-EN-BZS	- Bronze Square Trim (RDL4)
RDL4-EN-BZR	- Bronze Round Trim (RDL4)
RDL6-EN-WHS	- White Square Trim (RDL6)
RDL6-EN-BKS	- Black Square Trim (RDL6)
RDL6-EN-BKR	- Black Round Trim (RDL6)
RCAN-EN-MTGP	- Universal Plate With Hanging Bars
RDL-EN-RUNVP	- Universal Rough In Plate Extra Long
RCAN-EN-EXT6	- 6' Extension Cable
RCAN-EN-EXT10	- 10' Extension Cable
RCAN-EN-EXT12	- 12' Extension Cable
EM15-EN	- 15W Battery (Only Available for RDL1-EN Models)
EM25-EN	- 25W Battery
OPT24-EN	- Field Installable 24° Lens (Not Available for RDL3-EN Models)
OPT60-EN	- Field Installable 60° Lens (Not Available for RDL1-EN or RDL3-EN Models)
RDL-GR	- 4"-8" Goof Ring

COMPATIBILITY


MODEL NO.	BRAND
DAL06P	Cooper
9540	Cooper
ADTP703TU	Legrand
H703PTW	Legrand
6633	Leviton
6674	Leviton
6602	Leviton
IPL06	Leviton
AYCL-153P	Lutron
DV-600PR	Lutron
DVCL-153P	Lutron
MACL-153MH	Lutron
MRF2-6CL	Lutron
D-600P	Lutron
NTELV-300P	Lutron
S-600P	Lutron
CT-600P	Lutron
CTCL-153P	Lutron
TG-600P	Lutron
TGCL-153P	Lutron

DIMENSIONS


RDL1-EN

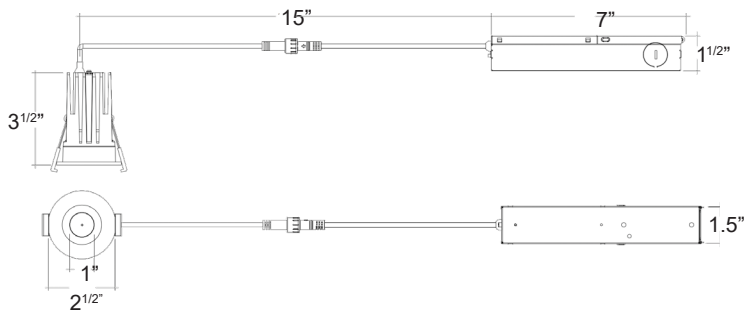


RDL3-EN

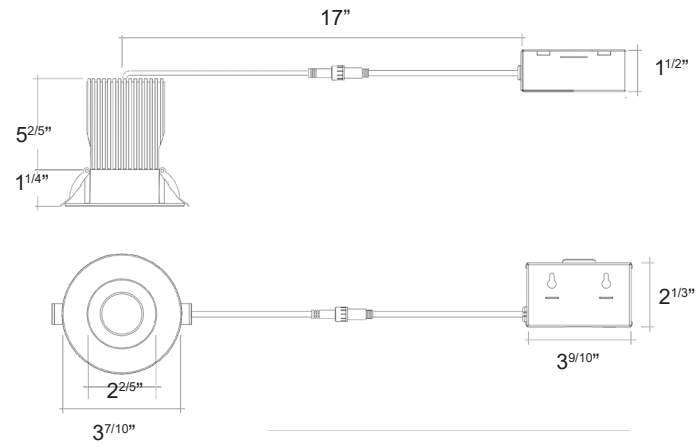


**RDL4-EN
(15W)**

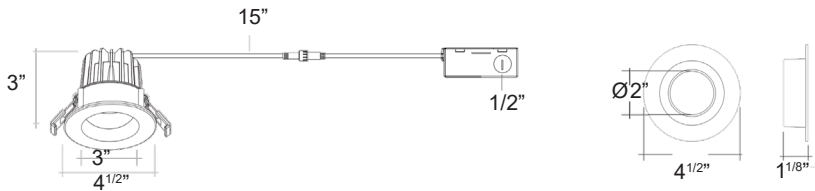

**RDL4-EN
(18W)**

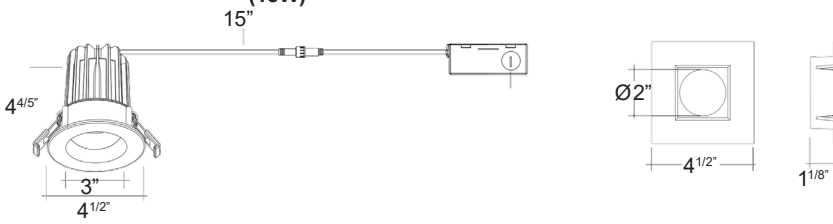

**RDL6-EN
(Round)**

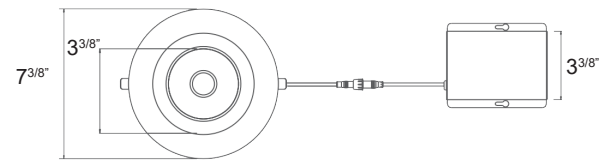

**RDL6-EN
(Square)**

