

SPECIFICATIONS

MULTIFAMILY

HOUSING

- Aluminum Body; white finish
- 14" Disk

ELECTRICAL

- 120V
- Dimmable driver standard (except for 22W-QT model)
- 50,000 Hours @ L₇₀
- -40°C - 40°C (-40°F - 104°F)

ILLUMINATION

- White acrylic diffuser
- 3000K, 4000K offered
- CRI: 80, 90

MOUNTING

- Surface Wall or Ceiling

CODE COMPLIANCE

- cULus Listed for Damp Locations
- RoHS Compliant
- Energy Star Rated

WARRANTY


- 5 Year



SD25-G
LED Surface Disk

ORDERING INFORMATION

CATALOG #	Wattage	Lumens	Color	CRI	Driver
SD25-G-14L-120V-30K	14W	1430 Lumens	3000K	80CRI	120V
SD25-G-14L-120V-40K	14W	1500 Lumens	4000K	80CRI	120V
SD25-G-16L-120V-30K	16W	1370 Lumens	3000K	90CRI	120V
SD25-G-16L-120V-40K	16W	1400 Lumens	4000K	90CRI	120V
SD25-G-22L-120V-30K	22W	1950 Lumens	3000K	80CRI	120V
SD25-G-22L-120V-40K	22W	2130 Lumens	4000K	80CRI	120V
SD25-G-22L-QT-30K	22W	1704 Lumens	3000K	80CRI	120V-277V
SD25-G-22L-QT-40K	22W	1824 Lumens	4000K	80CRI	120V-277V
SD25-G-24L-120V-30K	24W	1980 Lumens	3000K	90CRI	120V
SD25-G-24L-120V-40K	24W	2020 Lumens	4000K	90CRI	120V
SD25-G-31L-120V-30K	31W	2750 Lumens	3000K	90CRI	120V
SD25-G-31L-120V-40K	31W	2850 Lumens	4000K	90CRI	120V
SD25-G-32L-120V-30K	32W	2700 Lumens	3000K	80CRI	120V
SD25-G-32L-120V-40K	32W	2750 Lumens	4000K	80CRI	120V
SD25-G-2X40W-120V	2X40W Max Incandescent Medium Base, 120V				

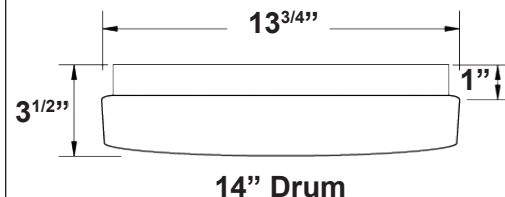

OPTIONS

- OCS - Occupancy Sensor (not available with incandescent model)
- 30K - 3000K A19/E26 LED Lamp (2x40W model only)
- 40K - 4000K A19/E26 LED Lamp (2x40W model only)