

SPECIFICATIONS

MULTI FAMILY

HOUSING

- Injection molded with aluminum backplate
- Offered in white, satin nickel, or black finish

ELECTRICAL

- 120 VAC
- 60 Hz
- Triac dimming driver standard or ELV dimmer switch
- Operating temperature: -20°C - 45°C (-4°F - 113°F)

OPTICAL SYSTEM

- White acrylic diffuser
- 12W (720 Lumens)
- 15W (1000 Lumens)
- 22W (1690 Lumens)
- MCT: Selectable between 3000K/4000K/5000K
- CRI $\geq$ 90
- 50,000 Hours @ L₇₀

MOUNTING

- Mounts to standard junction box (not included)
- Power Supply connections must be made inside the junction box
- Can be wall or ceiling mount

CODE COMPLIANCE


- Wet location rated; covered ceiling mount only for outdoor use
- Energy Star Certified
- cETLus Listed
- Energy Star Qualified
- Title 24 JA8 Compliant

WARRANTY

- 5 Year



SD40-AF-MCT
Edgelit LED Surface Disk

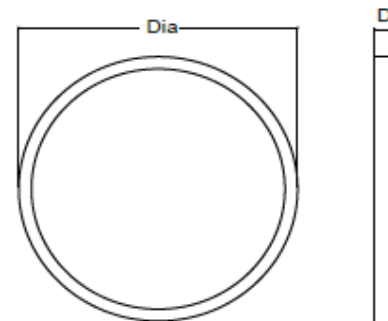

ORDERING INFORMATION

CATALOG#

SD40-AF-12L-120V-MCT-*	12W, 120VAC, 720 Lumens, 5-3/8" Ø x 3/4" D
SD40-AF-15L-120V-MCT-*	15W, 120VAC, 1000 Lumens, 8" Ø x 3/4" D
SD40-AF-22L-120V-MCT-*	22W, 120VAC, 1690 Lumens, 12" Ø x 3/4" D

*Specify WH-White, BK-Black, SN-Satin Nickel