

SPECIFICATIONS

MULTI-FAMILY

HOUSING

- Can be used in new construction and remodel applications
- Offered in 5", 7", 12", 15", 19", 24" sizes
- Plastic (5" and 7") and Metal (12", 15", 19", 24") housings
- Available in round and square housing
- White finish standard, also available in black, bronze, brushed nickel

OPTICAL SYSTEM

- Frosted acrylic lens
- CRI > 90
- Offered in 30K, MCT (adjustable 30K/40K/50K), or 5CT (adjustable 27K/30K/35K/40K/50K)

ELECTRICAL

- 120V driver (Triac dimmable down to 5%)
- QT - 120-277VAC (0-10V dimmable)
- Operating Temperature: -40°C (-40°F) - 45°C (114°F)
- 50,000 hours @ L₇₀

MOUNTING

- Mounts to a 3" or 4" JBox
- Surface mount bracket included
- 5", 7", & 12" recessed can be converter optional

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- Energy Star Rated
- Title24 JA8 Compliant CEC Listed
- FFC CFR 47

WARRANTY

- 5 Year

ORDERING INFORMATION

CATALOG#	Size	Housing	Wattage	Lumens	Driver	CCT
SD8-R-5-10L-120V-30K	5"	Round	10W	650 Lm	120V	30K
SD8-R-5-10L-120V-5CT	5"	Round	10W	650 Lm	120V	27K - 50K
SD8-R-5-10L-QT-5CT	5"	Round	10W	650 Lm	120-277V	27K - 50K
SD8-S-5-10L-120V-MCT	5"	Square	10W	650 Lm	120V	30K/40K/50K
SD8-S-5-10L-120V-5CT	5"	Square	10W	650 Lm	120V	27K - 50K
SD8-S-5-10L-QT-5CT	5"	Square	10W	650 Lm	120-277V	27K - 50K
SD8-R-7-15L-120V-30K	7"	Round	15W	1000 Lm	120V	30K
SD8-R-7-15L-120V-5CT	7"	Round	15W	1000 Lm	120V	27K - 50K
SD8-R-7-15L-QT-5CT	7"	Round	15W	1000 Lm	120-277V	27K - 50K
SD8-S-7-15L-120V-MCT	7"	Square	15W	1000 Lm	120V	30K/40K/50K
SD8-S-7-15L-120V-5CT	7"	Square	15W	1000 Lm	120V	27K - 50K
SD8-S-7-15L-QT-5CT	7"	Square	15W	1000 Lm	120-277V	27K - 50K
SD8-R-12-22L-120V-5CT	12"	Round	22W	1450 Lm	120V	27K - 50K
SD8-R-12-22L-QT-5CT	12"	Round	22W	1450 Lm	120-277V	27K - 50K
SD8-R-12-24L-120V-5CT	12"	Round	24W	1800 Lm	120V	27K - 50K
SD8-S-12-22L-120V-5CT	12"	Square	22W	1450 Lm	120V	27K - 50K
SD8-R-15-30L-120V-5CT	15"	Round	30W	2000 Lm	120V	27K - 50K
SD8-R-15-30L-QT-5CT	15"	Round	30W	2000 Lm	120-277V	27K - 50K
SD8-R-19-35L-120V-MCT	19"	Round	35W	2200 Lm	120V	30K/40K/50K
SD8-R-19-35L-120V-5CT	19"	Round	35W	2200 Lm	120V	27K - 50K
SD8-R-24-40L-120V-5CT	24"	Round	40W	2700 Lm	1 20V	27K - 50K

Options/Accessories on page 2



SD8
LED Canopy

Options (installed)

BN	- Brushed Nickel Housing (15"-120V and 19"-120V models only)
BL	- Black Housing (15"-120V, 19"-120V, 24"-120V models only)

Accessories (Ships on Side)


SD8-EM7	- Round Emergency Battery for 7" Round Housing
SD8-EM12	- Round Emergency Battery for 12" Round Housing
EM8-EN	- 8W Remote Emergency Battery (QT models) - for fixtures up to 15W
EM15-EN	- 15W Remote Emergency Battery (QT models) - for fixtures up to 22W
EM25-EN	- 25W Remote Emergency Battery (all models) - for fixtures up to 25W

SD8-CAN4	- 4" Recessed Can Converter (5" model)
SD8-CAN67	- 6" Recessed Can Converter (7" model)
SD8-CAN612	- 6" Recessed Can Converter (12" model)


SK6-EN-WH	- 6" Adjustable Stem Kit in White
SK6-EN-BK	- 6" Adjustable Stem Kit in Black

SD8-R*-BK-TRIM	- Round Black Trim
SD8-R*-BZ-TRIM	- Round Bronze Trim
SD8-R*-BN-TRIM	- Round Brushed Nickel Trim
SD8-S*-BK-TRIM	- Square Black Trim
SD8-S*-BZ-TRIM	- Square Bronze Trim
SD8-S*-BN-TRIM	- Square Brushed Nickel Trim


*Specify Size: 5, 7, 12

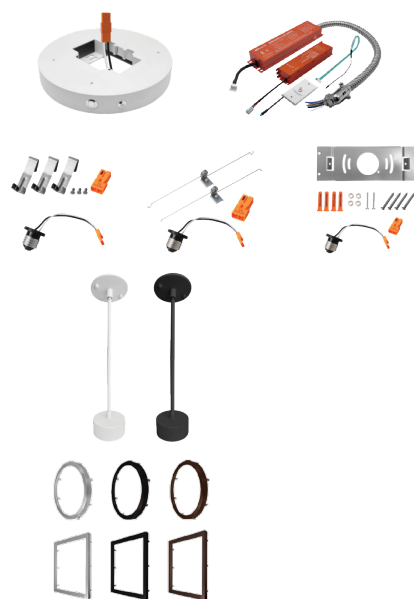


SD8-5'

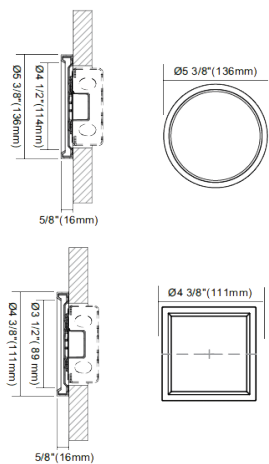


SD8-7'

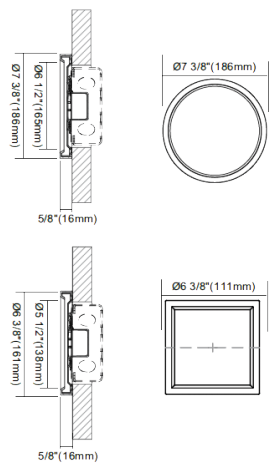

SD8-12

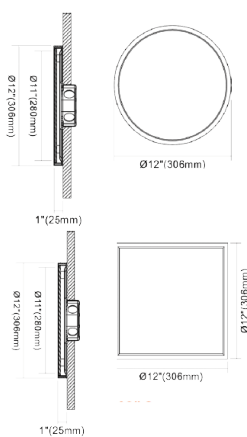

SD8-1

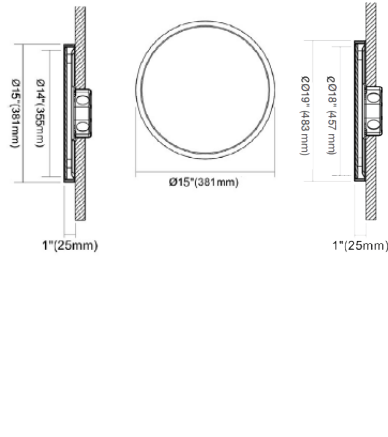

SD8-1

