

SPECIFICATIONS

MULTI-FAMILY

HOUSING

- Can be used in new construction and remodel applications
- Red back plate
- Metal housing and trim
- Offered in 4" and 6" housings
- White trim provided standard; black, bronze, and brushed nickel optional
- Spring clips with remote JBox eliminates the need for can
- 2 hour fire rating

OPTICAL SYSTEM

- Frosted polycarbonate lens
- 110° Beam angle
- CRI > 90
- 5CT selectable 27K/30K/35K/40K/50K
- Flat Lens or Stepped Baffle
- 50,000 Hours @ L₇₀

ELECTRICAL

- 120V
- QT (Quad Tap) - 120-277V
- Pf > .09; THD < 20%
- Triac dimmable down to 10%
- Operating Temperature: -20°C - 40°C (-4°F - 104°F)

MOUNTING

- External remote junction box mounts inside ceiling (IC rated)
- Trim snaps into place with tension spring clips

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- Meets UL263 Requirements
- Energy Star Rated
- JA8 Title24 Compliant
- Fire Rated
- TAA Compliant

WARRANTY

- 5 Year

ORDERING INFORMATION

CATALOG#	Size	Wattage	Lumens	CCT
SD9-FR-SA-4-10L-120V-5CT-FL	4"	10W	820 Lumens	27K/30K/35K/40K/50K
SD9-FR-SA-4-10L-120V-5CT-BF	4"	10W	820 Lumens	27K/30K/35K/40K/50K
SD9-FR-SA-4-10L-QT-5CT-FL	4"	10W	820 Lumens	27K/30K/35K/40K/50K
SD9-FR-SA-6-13L-120V-5CT-FL	6"	13W	1100 Lumens	27K/30K/35K/40K/50K
SD9-FR-SA-6-13L-120V-5CT-BF	6"	13W	1100 Lumens	27K/30K/35K/40K/50K
SD9-FR-SA-6-13L-QT-5CT-FL	6"	13W	1100 Lumens	27K/30K/35K/40K/50K


Accessories (Order Separately, Ships on Side)

SD9-SA-4-RI	- 4" Rough in Mounting Plate
SD9-SA-6-RI	- 6" Rough in Mounting Plate
RCAN-SA-4-MTGP	- 4" Mounting Plate with Hanger Bars
RCAN-SA-6-MTGP	- 6" Mounting Plate with Hanger Bars
GR4-SA	- 4" Goof Ring
GR6-SA	- 6" Goof Ring
EM5W-SA	- 5W Emergency Driver
EM10W-SA	- 10W Emergency Driver



SD9-FR-SA Snap-In Fire-Rated LED Downlight

DIMENSIONS

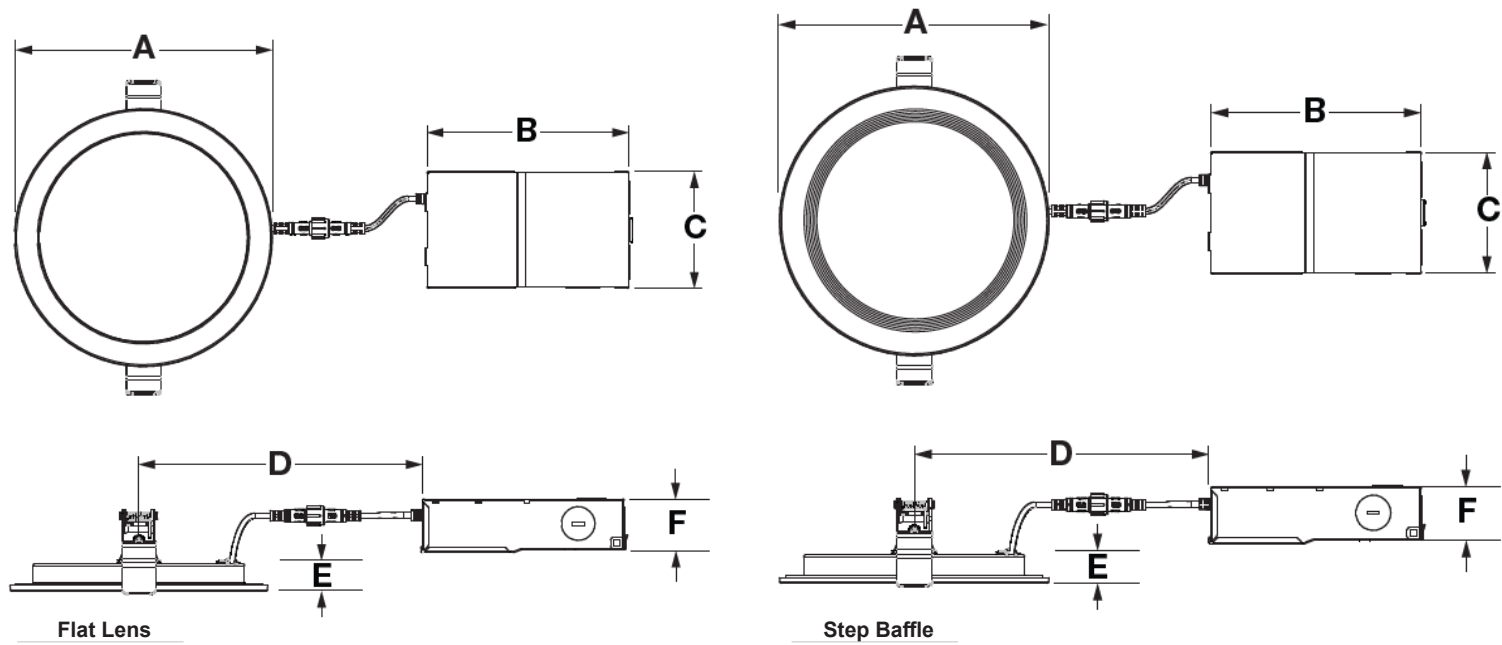

	A	B	C	D
SD9-FR-SA-4-10L-120V-5CT-FL	4.75"	5.31"	3.07"	16"
SD9-FR-SA-4-10L-120V-5CT-BF	4.75"	5.31"	3.07"	16"
SD9-FR-SA-4-10L-QT-5CT-FL	4.75"	6.64"	3.86"	16"
SD9-FR-SA-6-13L-120V-5CT-FL	6.79"	5.31"	3.07"	16"
SD9-FR-SA-6-13L-120V-5CT-BF	6.79"	5.31"	3.07"	16"
SD9-FR-SA-6-13L-QT-5CT-FL	6.79"	6.64"	3.86"	16"