

SPECIFICATIONS

MULTI-FAMILY

HOUSING

- Can be used in new construction and remodel applications
- Die cast spun aluminum with white powder coat finish
- Smooth recessed trim
- Offered in 4" and 6" housings
- Jbox included with 24" DC cord

OPTICAL SYSTEM

- 0.125" White translucent acrylic lens
- 100°-110° Beam angle
- CRI ≥ 80
- 5CT selectable 27K/30K/35K/40K/50K
- 50,000 Hours @ L₇₀

ELECTRICAL

- 120V
- Triac dimmable down to 10%
- 2 hour fire rating
- Operating Temperature: -4°F - 104°F (-20°C - 40°C)
- Power factor >.90
- THD≤15%

MOUNTING

- Recessed Mounting

CODE COMPLIANCE

- cETLus Listed for Damp Locations
- Energy Star Rated
- Fire Rated

WARRANTY

- 5 Year



SD9-FR-W
Snap-In Fire-Rated
LED Downlight

ORDERING INFORMATION


CATALOG#	Shape	Size	Wattage	Lumens	CCT
SD9-FR-W-S-4-9L-120V-5CT	Square	4"	9W	630 Lumens	27K/30K/35K/40K/50K
SD9-FR-W-S-6-12L-120V-5CT	Square	6"	12W	840 Lumens	27K/30K/35K/40K/50K

OPTIONS (Factory Installed)


- EM - Emergency Battery Backup

ACCESSORIES (Ships Installed)


- SD9-RI-6 - 6" Square Rough-in Plate, 26" Long
- SD9-EXT10 - 10' Extension Cable
- SD9-RIBH - 3", 4", 6" Adjustable Square Galvanized Plate with Bar Hangers

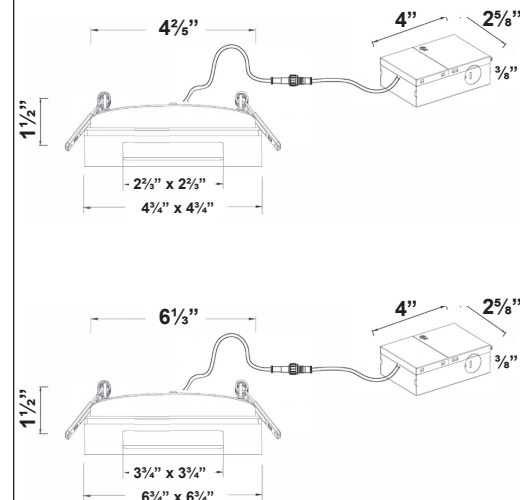


4"Model

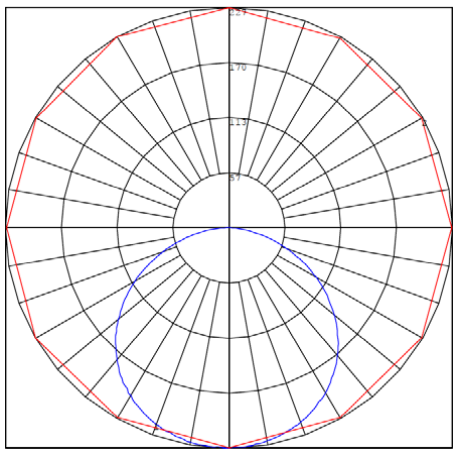


BUG Rating: B2-U1-G0

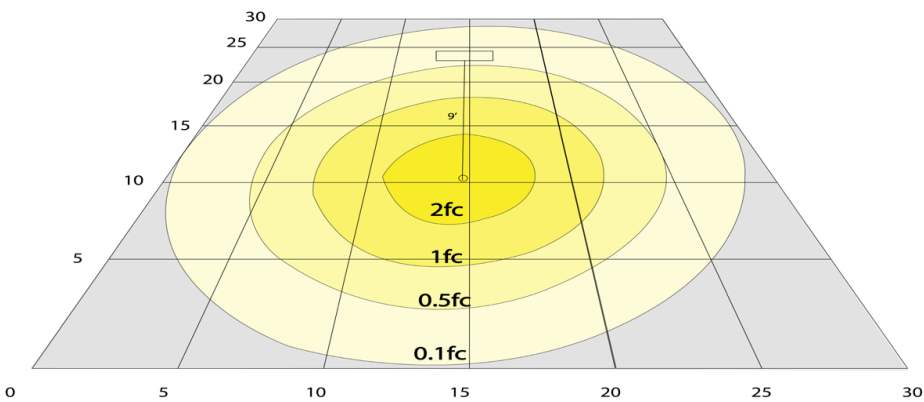

9W 5000K, Area 30'x30' Mounting Height 9'

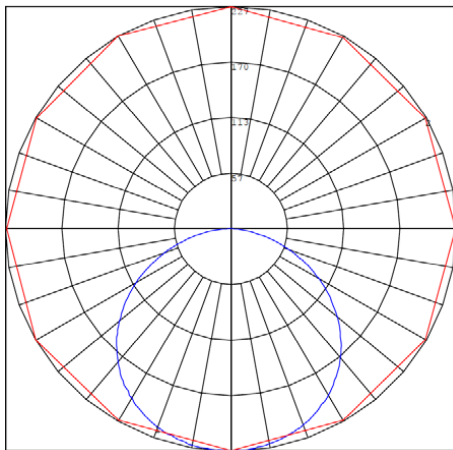

BUG Rating: B2-U1-G0

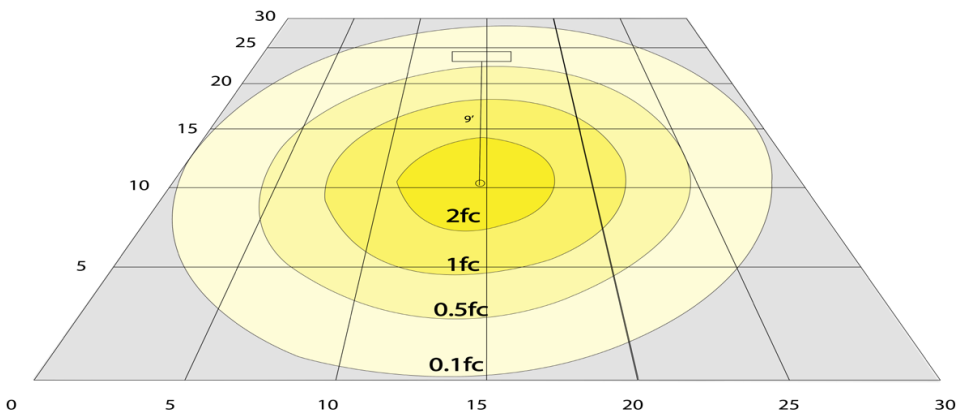

9W 5000K, Area 30'x30' Mounting Height 9'