

SPECIFICATIONS

MULTI-FAMILY

HOUSING

- Metal housing and trim
- Offered in 4", 6", and 8" housings
- Metal housing and trim for better heat dissipation
- White Trim provided standard; black, bronze, and brushed nickel trims available
- Spring clips with remote j-box eliminates can

ILLUMINATION

- Frosted acrylic, non-yellowing
- Beam angle: 110°
- 50,000 hours @L₇₀
- CRI > 90
- 5CT: Selectable between 2700K/3000K/3500K/4000K/5000K

ELECTRICAL

- Quad Tap (QT) 120V-277V
- 0-10V Dimmable
- 2.5kV Surge Protection
- Operating temperature: -25°C (-13°F) - 40°C (104°F)

MOUNTING

- Cutout dimensions: 4": 4.33"; 6": 6.30"; 8": 8.25"
- No can needed in remodel applications, tension clips mount into .5" and 1.5" ceiling
- Pre-wired j-box with wiring built in (3 in/ 3 out)

CODE COMPLIANCE

- cULus Listed for Wet Locations
- Energy Star Rated
- Title24 Compliant

WARRANTY

- 5 year warranty



SD9.5 Snap-In LED Downlight

ORDERING INFORMATION

CATALOG#	Size	Wattage	Lumens	CCT
SD9.5-4-1L-QT-5CT	4"	7W/9W/12W	600/800/1000Lms	27K/30K/35K/40K/50K
SD9.5-6-1L-QT-5CT	6"	9W/12W/17W	800/1050/1400Lms	27K/30K/35K/40K/50K
SD9.5-8-1L-QT-5CT	8"	12W/17W/23W	1100/1500/1900Lms	27K/30K/35K/40K/50K


OPTIONS (Factory Installed)

EM - Emergency Backup Battery


ACCESSORIES (Order Separately, Ships on Side)

SD9-4R-BZ	- Round 4" Bronze Trim
SD9-4R-BK	- Round 4" Black Trim
SD9-4R-BN	- Round 4" Brushed Nickel Trim
SD9-6R-BZ	- Round 6" Bronze Trim
SD9-6R-BK	- Round 6" Black Trim
SD9-6R-BN	- Round 6" Brushed Nickel Trim
SD9-JBOX6	- 6' JBox Connector Extension Cable
SD9-JBOX10	- 10' JBox Connector Extension Cable
SD9-JBOX12	- 12' Jbox Connector Extension Cable
SD9-4-RI	- 4" Rough-In Plate (6.5" x 13.25")
SD9-6-RI	- 6" Rough-In Plate (8.5" x 17.25")
SD9-8-RI	- 8" Rough-In Plate (10.5" x 26")
EM15-EN	- 15W Emergency Battery
EM25-EN	- 25W Emergency Battery
SD9-GR4	- 4" Goof Ring
SD9-GR6	- 6" Goof Ring
SD9-GR8	- 8" Goof Ring

4" Round

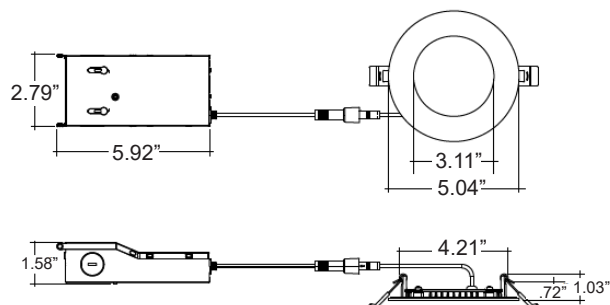

6" Round

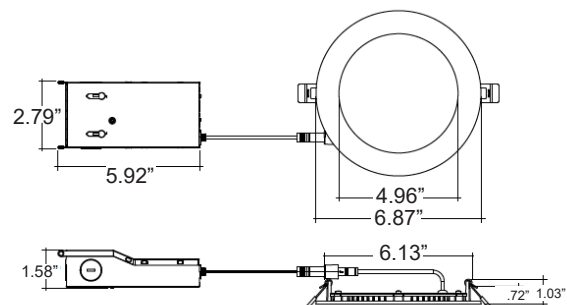

8" Round

