

SPECIFICATIONS

OUTDOOR

HOUSING

- Die cast aluminum housing
- Available in black, white, silver, and bronze finishes
- 16AWG Cable (118")

ELECTRICAL

- Quad Tap (120-277V)
- 277-480V optional
- 12V auxiliary dimming standard
- Operating Temp: -22°F - 113°F (-30°C - 45°C)
- Power Factor > 0.95
- 75,000 Hours @ L₇₀
- 10kV Surge protection standard

OPTICAL SYSTEM

- 4000K and 5000K available
- CRI: 80
- Nema III, Nema IV, and Nema V distributions available

MOUNTING

- Trunnion Mount standard
- Slipfitter optional

CODE COMPLIANCE

- cULus Listed for Wet Locations
- DLC Premium Listed
- ROHS Compliant
- FCC Compliant
- IP30

WARRANTY

- 5 Year



SL6-WS LED SportsLight

ORDERING INFORMATION


CATALOG#	Illumination	Voltage	CCT	Distribution	Color
SL6-WS	400L (400W, 56,800 Lm)	QT (120-277V)	40K	T3	BZ
	600L (600W, 85,200 Lm)	480V (277V - 480V)	50K	T4	WH
				T5	BK
					SV

OPTIONS (Factory Installed)

SF - SlipFitter (Trunnion standard)

ACCESSORIES (Factory Installed)

SL6-WS-REM - Dali-2 Dimmable Controller


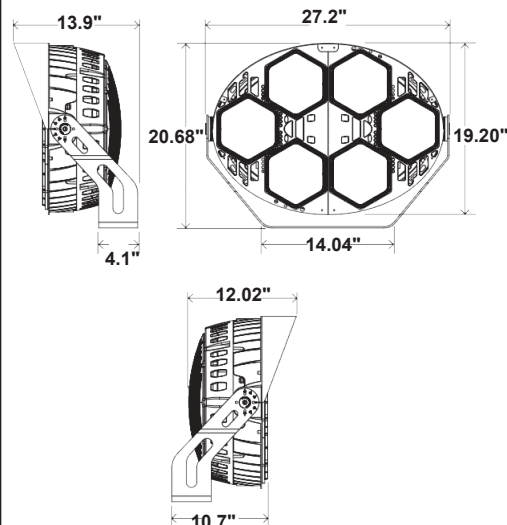


ELECTRICAL INFORMATION

WATTAGE	CURRENT (VOLTAGE) (AMP)					
	120V	208V	240V	277V	347V	480V
SL6-WS-400L	3.33	1.92	1.6	1.44	1.15	0.83
SL6-WS-600L	5.0	2.8	2.5	2.16	1.72	1.25



PHOTOMETRICS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

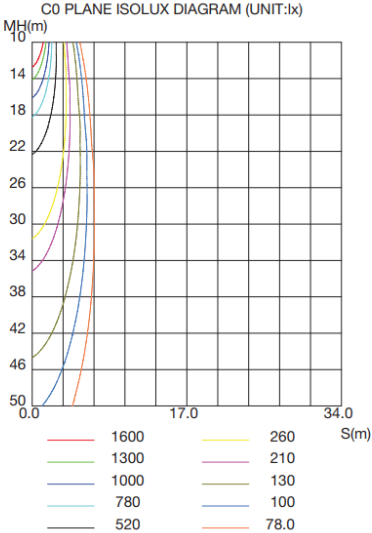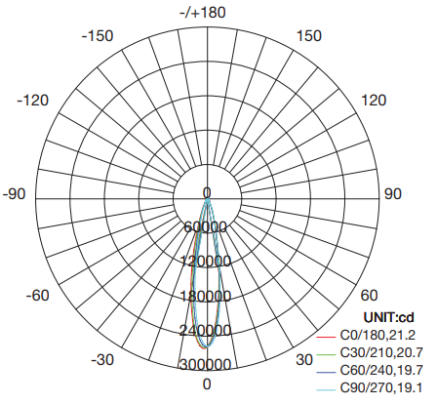


SL6-WS-400L-QT-50K-T3

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

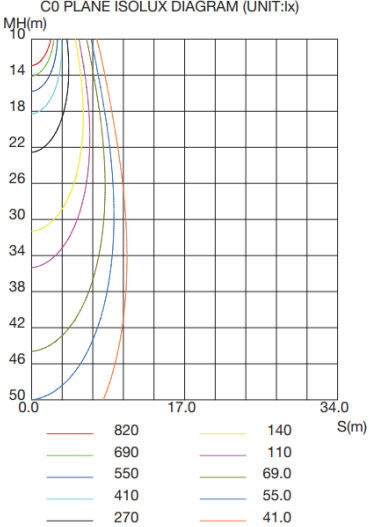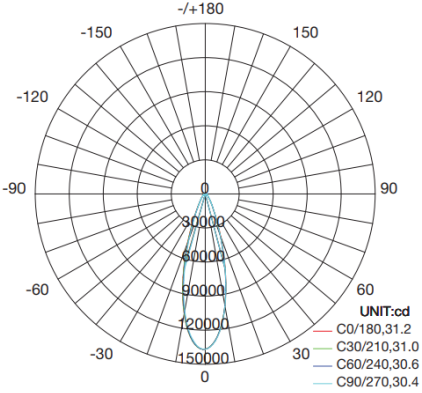


SL6-WS-400L-QT-50K-T4

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

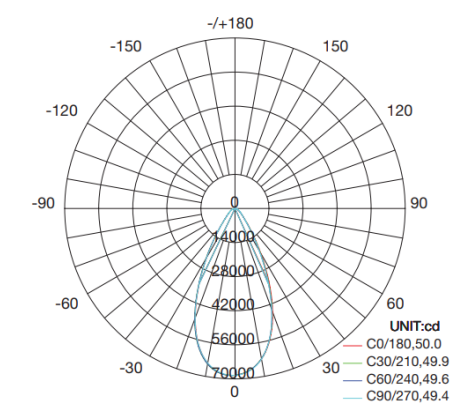

AVERAGE BEAM ANGLE(50%):49.7 DEG

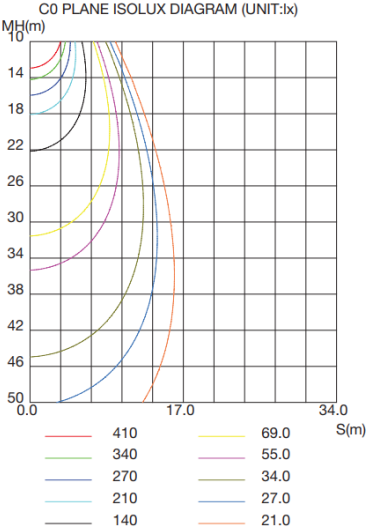

SL6-WS-400L-QT-50K-T5