

SPECIFICATIONS

MULTI FAMILY

HOUSING

- Non-Corrosive Powder Coated Steel Body
- Offered in 12", 16", and 32" models

ELECTRICAL

- 120V
- 60Hz
- 0-10V Dimmable Driver standard
- Operating temperature: -4°F - 104°F (-20°C - 40°C)
- Power factor >.90

OPTICAL SYSTEM

- Acrylic Lens
- CRI :90
- 5CT (2700K/3000K/3500K/4000K/5000K)

CODE COMPLIANCE


- cETLus Listed
- California Title 24 Compliant

WARRANTY

- 5 Year



SR5 LED Spill Ring

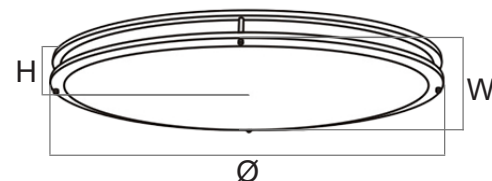

ORDERING INFORMATION

CATALOG#	Wattage	Lumens	Color
SR5-15L-120V-5CT	15W	1050 Lumens	27K/30K/35K/40K/50K
SR5-25L-120V-5CT	25W	1750 Lumens	27K/30K/35K/40K/50K
SR5-50L-120V-5CT	50W	3700 Lumens	27K/30K/35K/40K/50K

	Ø	H	W
15L	12"	2.6"	12"
25L	16"	2.6"	16"
50L	32"	4"	18"