

SPECIFICATIONS

INDOOR

HOUSING

- Aluminum housing
- 5 stage phosphate bonding process finished with high reflectance baked enamel
- Available in white and black finish

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- Operating Temperature: -30°C (-22°F) - 40°C (104°F)
- 50,000 hours
- THD <19%
- Pf > .95

OPTICAL SYSTEM

- Opal polycarbonate lens
- Beam angle: 115° x 109.6°
- MT (Selectable between 30K/35K/40K)
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI ≥ 80

MOUNTING

- Two 10' adjustable suspension cables
- Pendant mounted

CODE COMPLIANCE

- UL Listed for Indoor Locations
- IP20 Rated

WARRANTY

- 5 Year



SST1-W-MCT


Color and Wattage
Selectable LED
Suspended Strip

ORDERING INFORMATION


CATALOG #	Size	Wattage	Lumens	CCT
SST1-W-4X1L-QT-MCT	4'	20W / 25W / 30W	2100 / 2625 / 3150 Lm	30K/35K/40K
SST1-W-6X1L-QT-MCT	6'	25W / 40W / 50W	2625 / 4200 / 5250 Lm	30K/35K/40K
SST1-W-8X1L-QT-MCT	8'	40W / 50W / 60W	4200 / 5250 / 6300 Lm	30K/35K/40K

OPTIONS (Factory Installed)


EM	- Internal Battery Backup
USB	- Ultrasonic BiLevel Dimming
BK	- Black Housing (white standard)

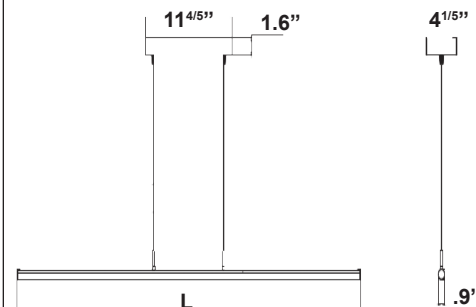

SST1-W-4X1L-QT-MCT
30W, 4000K, 50'X40' Area, 9' Mounting Height
BUD Rating: B1-U2-G1

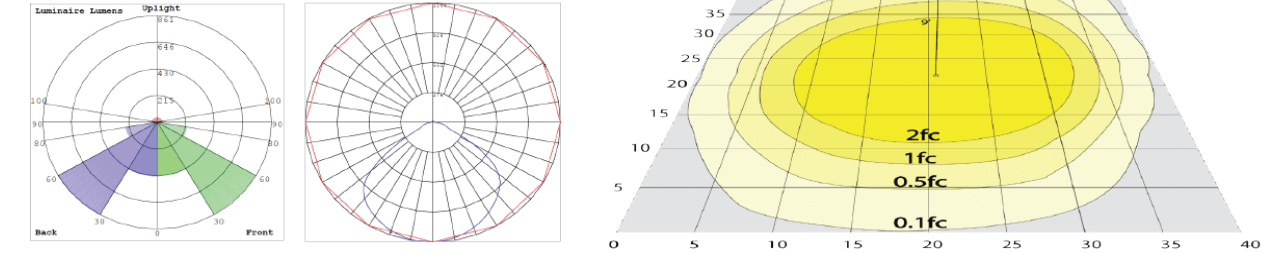

SST1-W-6X1L-QT-MCT
30W, 4000K, 50'X40' Area, 9' Mounting Height
BUD Rating: B1-U2-G1

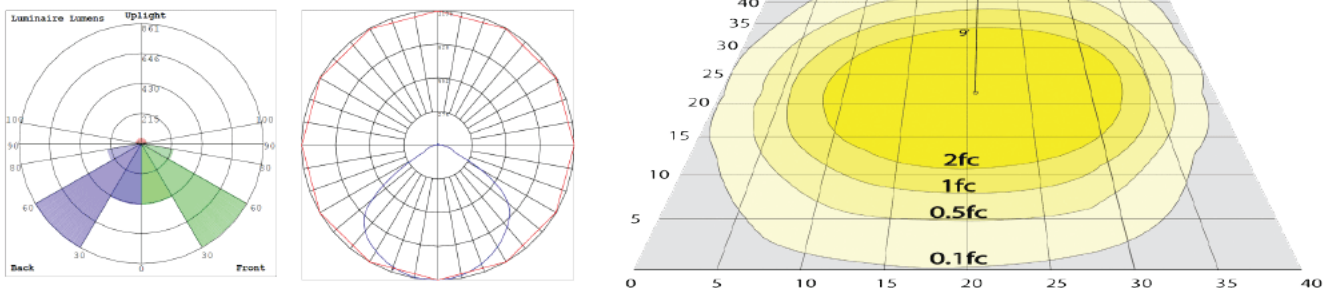

SST1-W-8X1L-QT-MCT
60W, 4000K, 100'X80' Area, 9' Mounting Height
BUD Rating: B1-U2-G1

