

SPECIFICATIONS

INDOOR

HOUSING

- Die-formed cold rolled steel housing
- High reflectance baked white enamel finish
- For single or continuous run row mounting
- Offered in 2', 4', and 8' models

ELECTRICAL

- Quad Tap (QT) - 120-277V

OPTICAL SYSTEM

- CRI >80
- Offered in 30K, 35K, 40K, and 50K

MOUNTING


- Surface mount or suspension mount (kit included) standard

CODE COMPLIANCE

- cULus Listed for Damp Location
- BAA Compliant

WARRANTY

- 1 Year Warranty

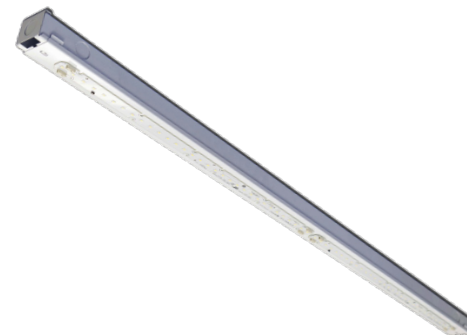

ST1-K Fluorescent Strip

CATALOG #	Size/Wattage	Driver	Color
ST1-K	2'	QT	30K
	2X17L (17W, 3166 Lm)		35K
	2X24L (24W, 4350 Lm)		40K
	2X31L (31W, 5470 Lm)		50K
	2X39L (39W, 6452 Lm)		
	4'		
	4X17L (17W, 3220 Lm)		
	4X24L (24W, 4480 Lm)		
	4X30L (30W, 5705 Lm)		
	4X37L (37W, 6910 Lm)		
	4X48L (48W, 8640 Lm)		
	4X70L (70W, 11,797 Lm)		
	8'		
	8X17L (17W, 3220 Lm)		
	8X24L (24W, 4480 Lm)		
	8X30L (30W, 5705 Lm)		
	8X37L (37W, 6910 Lm)		
	8X48L (48W, 8640 Lm)		
	8X70L (70W, 11,797 Lm)		
	8X74L (74W, 13,820 Lm)		
	8X96L (96W, 17,280 Lm)		

OPTIONS (Factory Installed)

- EM5 - 5W Emergency Battery
- EM10 - 10W Emergency Battery
- EM14 - 14W Emergency Battery
- OCS - External Occupancy Sensor
- OCSD - Bi-Level Dimming System
- GO - Grounded Outlet
- TS - Toggle Switch
- PC - Pull Chain Switch
- CP - Cord & Plug
- PL - Prismatic Lens

ACCESSORIES (Order Separately, Ships on Side)

- ST1-K-WG4 - 4' Wireguard

