

SPECIFICATIONS

INDOOR

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- Power factor > .90
- Operating temperature: -20°C - 50°C (-4°F - 122°F)
- THD < 20%

OPTICAL SYSTEM

- Low optical flicker
- CRI > 80
- MCT: Selectable between 35K/40K/50K

CODE COMPLIANCE

- cULus Listed for Indoor Locations
- DLC Listed

WARRANTY

- 5 Year



ST14-K LED Channel Strip Light




CATALOG #	Length	Wattage	Lumens	Color
ST14-K-4X1L-QT-MCT	4'	18W/23W/32W	2,500 - 4,225 Lm	35K/40K/50K
ST14-K-8X1L-QT-MCT	8'	35W/46W/55W	4,900 - 7,250 Lm	35K/40K/50K


Model	L	W	H
4X1L	48"	4.75"	4.42"
8X1L	96"	4.75"	4.42"

ST14-K-4X1L

ISOCANDELA PLOT

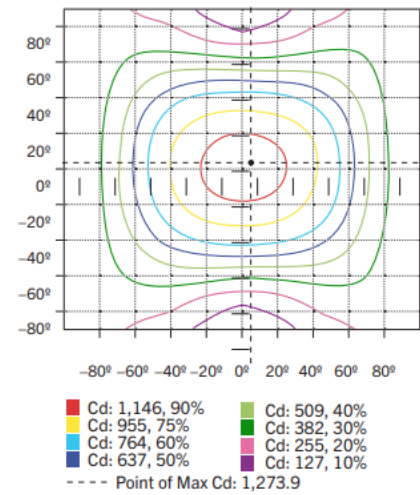

POLAR CANDELA DISTRIBUTION

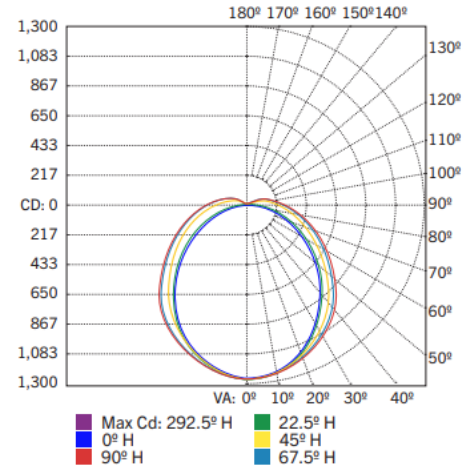


ZONAL LUMEN SUMMARY


Zone	Lumens	% Luminaire
0-60	2,796.1	66.80%
60-90	1,073.9	25.70%
0-90	3,869.9	92.50%
90-180	313.2	7.50%
0-180	4,183.1	100%

ST14-K-8X1L

ISOCANDELA PLOT

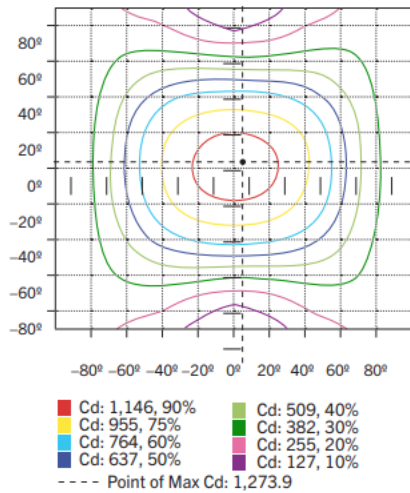

POLAR CANDELA DISTRIBUTION

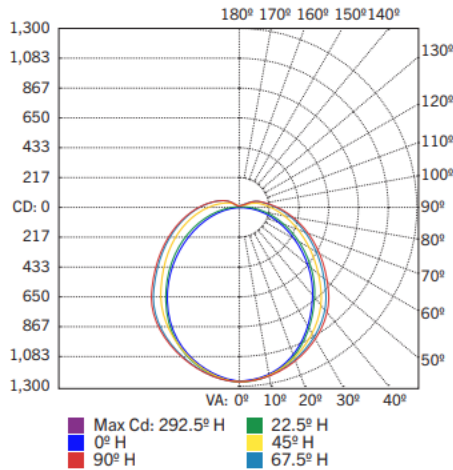

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-60	2,796.1	66.80%
60-90	1,073.9	25.70%
0-90	3,869.9	92.50%
90-180	313.2	7.50%
0-180	4,183.1	100%