

SPECIFICATIONS

INDOOR

HOUSING

- Heavy gauge steel housing
- Baked white enamel
- Socket bar and end plate allow for tool-free assembly
- End-plate doubles as coupler when fixture is used in continuous run
- Knockouts for pendant/surface mount. Linkable with 7/8" knockout on end plate

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- Power factor > .90
- THD < 20%
- 4kV Surge Protection
- 50,000 hours @ L₇₀

OPTICAL SYSTEM


- Symmetrical and asymmetrical reflectors available
- CRI > 80
- Offered in 30 - 50K

CODE COMPLIANCE

- cULus Listed for Damp Locations
- BAA Compliant
- FCC Compliant
- RoHS Compliant

WARRANTY

- 5 Year

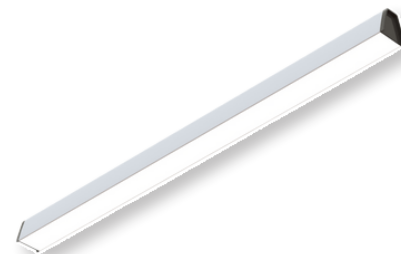

ST18-K LED Channel Strip Light

ORDERING INFORMATION

MODEL #	Size x Wattage	Voltage	CCT
ST18-K	2FT	QT (120-277V)	30K
	2X17L (17W, 3166 Lm)		35K
	2X24L (24W, 4350 Lm)		40K
	2X31L (31W, 5470 Lm)		50K
	2X39L (39W, 6452 Lm)		
	4FT		
	4X17L (17W, 3220 Lm)		
	4X24L (24W, 4480 Lm)		
	4X30L (30W, 5705 Lm)		
	4X37L (37W, 6910 Lm)		
	4X48L (48W, 8640 Lm)		
	4X70L (70W, 11,797 Lm)		
	8FT		
	8X17L (17W, 3220 Lm)		
	8X24L (24W, 4480 Lm)		
	8X30L (30W, 5705 Lm)		
	8X37L (37W, 6910 Lm)		
	8X48L (48W, 8640 Lm)		
	8X70L (70W, 11,797 Lm)		
	8X74L (74W, 13,820 Lm)		
	8X96L (96W, 17,280 Lm)		
	8X140L (140W, 23,594 Lm)		

OPTIONS (Factory Installed)

EM	- Emergency Driver
OCS	- External Occupancy Sensor
OCSD	- Bi-Level Dimming System
TS	- Toggle Switch
PC	- Pull Chain Switch
CP	- Cord & Plug
RE	- Relay System for Daisy Chaining
WMB	- Wall Mount Bracket

ACCESSORIES (Order Separately)

ST-K-WG	- 4' Wireguard
---------	----------------

Dimensions on 2nd page

