

SPECIFICATIONS

INDOOR

HOUSING

- Steel housing
- Easy installation in new construction or retrofit applications
- Available in 2' and 4' housing

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 0-10V Dimmable Driver standard
- Operating Temperature: -20°C (-4°F) - 50°C (122°F)
- Power Factor > 0.95
- THD <20%
- 50,000 hours @ L₇₀

OPTICAL SYSTEM

- Frosted PMMA Lens
- MCT (Selectable between: 3500K, 4000K, 5000K)
- Wattage Selectable
- CRI > 80

INSTALLATION

- Chain mounting provided by others

CODE COMPLIANCE

- cULus 1598 Listed for Damp Locations
- DLC Listed

WARRANTY

- 5 Year




ST3-K-MCT Led Selectable Strip Light

ORDERING INFORMATION

CATALOG #	Wattage	Lumens	Color
ST3-K-2X1L-QT-MCT	15W /20W / 25W	2,085 - 3,300 Lm	35K/40K/50K
ST3-K-4X1L-QT-MCT	18W /28W / 44W	2,500 - 5,890 Lm	35K/40K/50K
ST3-K-8X1L-QT-MCT	54W /75W / 90W	7,668 - 12,000 Lm	35K/40K/50K

OPTIONS (Factory Installed)

EM5	- 5W Emergency Battery
EM10	- 10W Emergency Battery
EM14	- 14W Emergency Battery
OCS	- External Occupancy Sensor
OCS D	- Bi-Level Dimming System
CP	- Cord and Plug

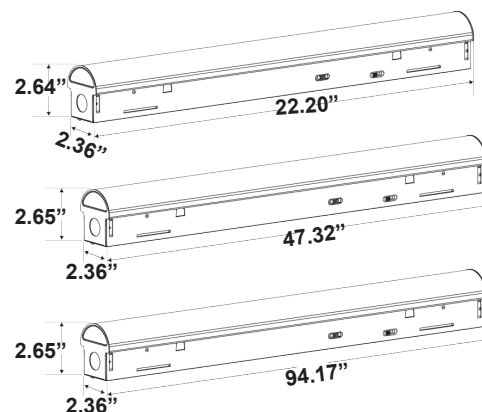


LUMEN INFORMATION


Catalog #	Low Lumens			Mid Lumens			High Lumens		
ST3-K-2X1L	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
	2085 Lm	2100 Lm	2115 Lm	2720 Lm	2740 Lm	2760 Lm	3250 Lm	3275 Lm	3300 Lm
	15W	15W	15W	20W	20W	20W	25W	25W	25W
ST3-K-4X1L	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
	18W	18W	18W	28W	28W	28W	44W	44W	44W
	2556 Lm	2574 Lm	2592 Lm	3892 Lm	3920 Lm	3948 Lm	5808 Lm	5852 Lm	5896 Lm
ST3-K-8X1L	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
	54W	54W	54W	75W	75W	75W	90W	90W	90W
	7,668 Lm	7,722 Lm	7,776 Lm	10,125 Lm	10,200 Lm	10,275 Lm	11,880 Lm	11,970 Lm	12,060 Lm

PHOTOMETRICS

ST3-K-2X1L

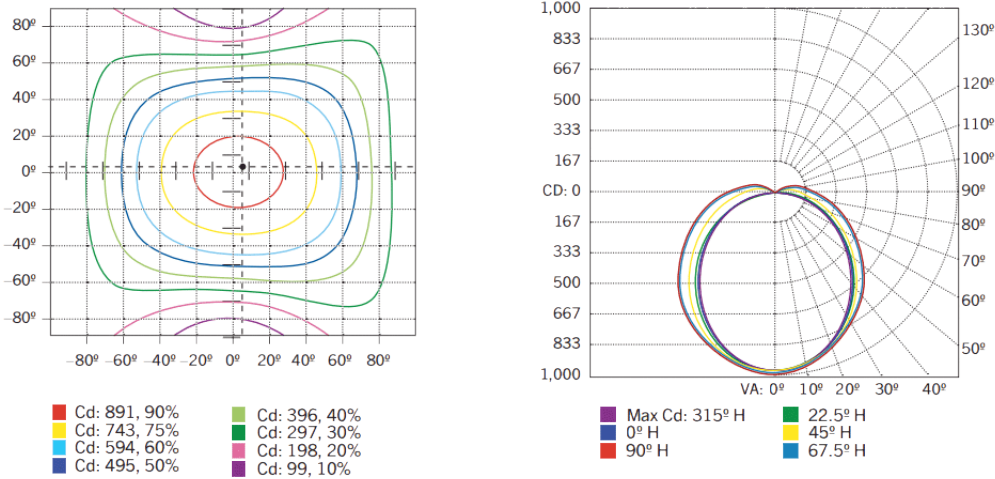

ST3-K-4X1L

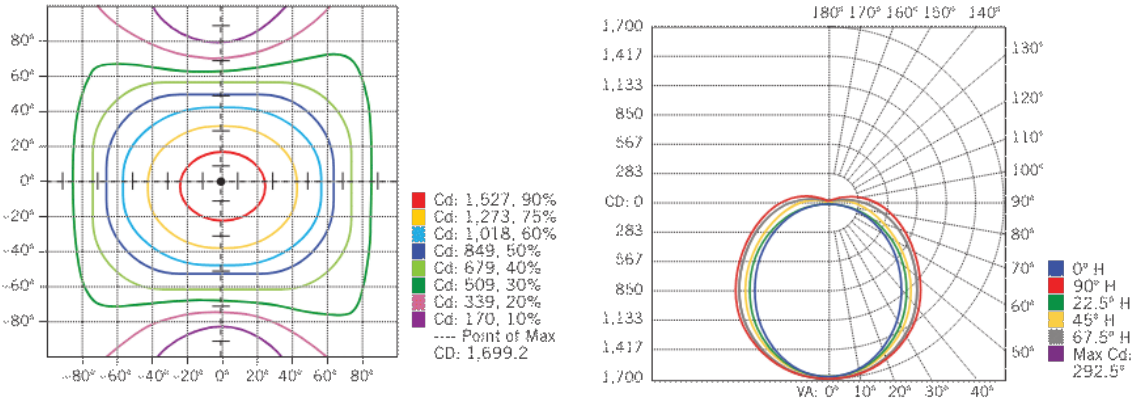

ST3-K-8X1L

