

SPECIFICATIONS

INDOOR

HOUSING

- Steel housing
- Easy installation in new construction or retrofit applications
- Available in 2' and 4' housing

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 0-10V Dimmable Driver standard
- Operating Temperature: -20°C (-4°F) - 50°C (122°F)
- Power Factor > 0.95
- THD <20%
- 50,000 hours @ L₇₀

OPTICAL SYSTEM

- Frosted PMMA Lens
- MCT: Field Selectable; 3500K, 4000K, 5000K
- Wattage Selectable: 15W, 20W, 25W
- CRI > 80

INSTALLATION

- Chain mounting provided by others

CODE COMPLIANCE

- cULus 1598 Listed for Damp Locations
- DLC Listed

WARRANTY

- 5 Year




ST3-K-MCT Led Selectable Strip Light

ORDERING INFORMATION

CATALOG #	Wattage	Lumens	Color
ST3-K-2X1L-QT-MCT	15W /20W / 25W	2,085 - 3,300 Lm	35K/40K/50K
ST3-K-4X1L-QT-MCT	18W /28W / 44W	2,555 - 5,896 Lm	35K/40K/50K

OPTIONS (Factory Installed)

OCS	- Integral Occupancy Sensor
EM	- Emergency Battery
WG	- Wireguard

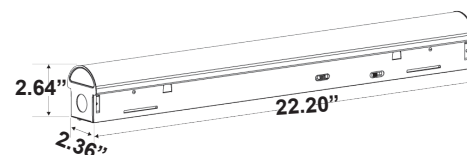


LUMEN INFORMATION

Catalog #	Low Lumens			Mid Lumens			High Lumens		
ST3-K-2X1L	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
	2085 Lm	2100 Lm	2115 Lm	2720 Lm	2740 Lm	2760 Lm	3250 Lm	3275 Lm	3300 Lm
	15W	15W	15W	20W	20W	20W	25W	25W	25W
ST3-K-4X1L	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
	18W	18W	18W	28W	28W	28W	44W	44W	44W
	2556 Lm	2574 Lm	2592 Lm	3892 Lm	3920 Lm	3948 Lm	5808 Lm	5852 Lm	5896 Lm

PHOTOMETRICS

ST3-K-2X1L

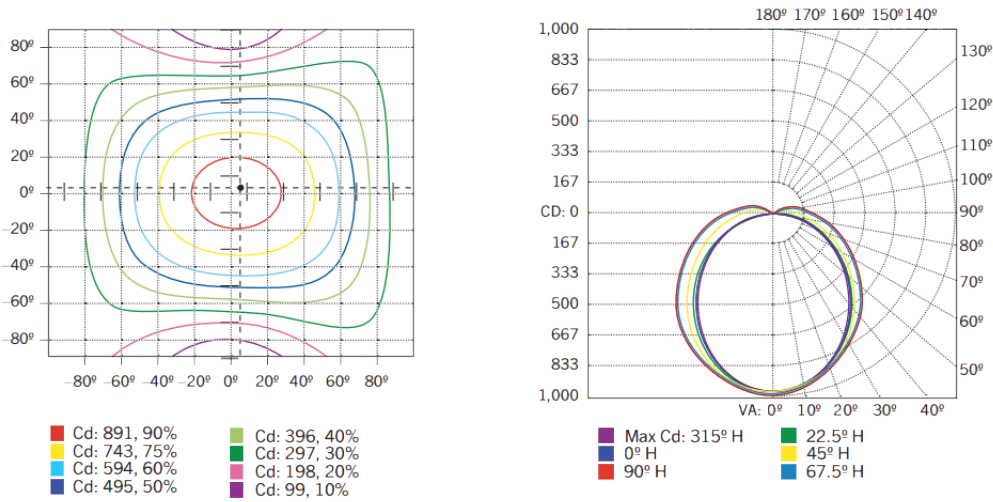

ST3-K-4X1L

