

SPECIFICATIONS

OUTDOOR

HOUSING

- Black polycarbonate housing
- Knockouts for conduit

ELECTRICAL

- Operating Temperature: -40°C (-40°F) - 40°C (104°F)
- 120VAC

ILLUMINATION

- Frosted glass lens
- Beam angle: 120°
- 50,000Hrs @ L₇₀
- Offered in 3000K and 4000K

MOUNTING

- Installs in single-gang J-Box or weatherproof box

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- IP65 Rated

WARRANTY

- 5 Year



STP2
LED Step Light

ORDERING INFORMATION


Step Light


CATALOG #	Wattage	Lumens	Color	Voltage
STP2-3L-120V-30K	3W	90 Lumens	3000K	120V
STP2-3L-120V-50K	3W	104 Lumens	5000K	120V

Step Light Face Plates (Order Separately Ships on Side)

CATALOG

- STP2-HL-OB
- STP2-HL-BN
- STP2-HL-WH
- STP2-HL-AB
- STP2-FL-OB
- STP2-FL-BN
- STP2-FL-WH
- STP2-FL-AB
- STP2-SC-OB
- STP2-SC-BN
- STP2-SC-WH
- STP2-SC-AB
- STP2-VL-OB
- STP2-VL-BN
- STP2-VL-WH
- STP2-VL-AB

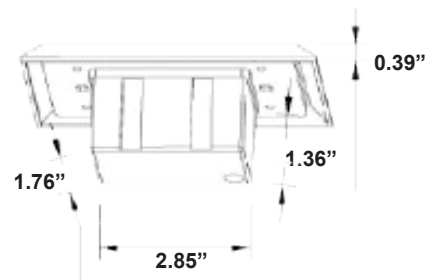

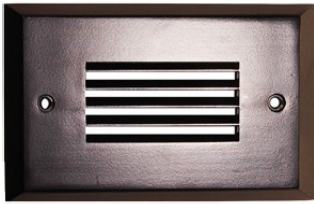

STP2-HL-OB



STP2-HL-BN




STP2-HL-WH




STP2-HL-AB



STP2-FL-OB



STP2-FL-BN



STP2-FL-WH



STP2-FL-AB



STP2-SC-OB



STP2-SC-BN



STP2-SC-WH



STP2-SC-AB



STP2-VL-OB



STP2-VL-BN



STP2-VL-WH



STP2-VL-AB