

SPECIFICATIONS

INDOOR

HOUSING

- Post-painted steel housing
- Available in 2' and 4' models

ELECTRICAL

- Quad Tap (QT) 120-277V
- 0-10V Dimmable Driver Standard
- Operating temperature: -20°C - 50°C (-4°F - 122°F)
- Pf > .95
- THD < 20%
- Integrated bi-level ultrasonic occupancy sensor
- 50,000 hours @ L₇₀

OPTICAL SYSTEM

- PMMA diffused lens
- CRI > 80
- MCT: Selectable between 3500K/4000K/5000K

CODE COMPLIANCE

- cULus Listed for Damp Locations
- DLC Listed

WARRANTY

- 5 Year




SW5-K LED Stairwell

ORDERING INFORMATION

CATALOG #	Length	Wattage	Lumens	CCT
SW5-K-2X1L-QT-MCT	2'	15W/20W/25W	1965 / 2560 / 3125 Lms	35K/40K/50K
SW5-K-4X1L-QT-MCT	4'	30W/35W/45W	3960 / 4515 / 5535 Lms	35K/40K/50K

OPTIONS (Factory Installed)

EM5 - 5W Emergency Battery

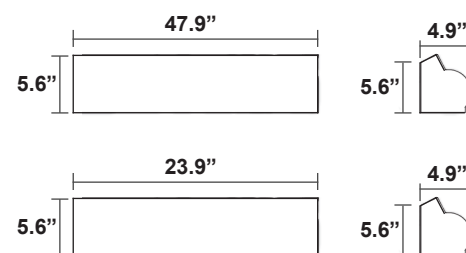


LUMEN INFORMATION

Catalog #	Low Lumens			Mid Lumens			High Lumens		
SW5-K-2X1L-QT-MCT	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
	1950 Lm	1965 Lm	1980 Lm	2540 Lm	2560 Lm	2580 Lm	3100 Lm	3125 Lm	3150 Lm
	15W	15W	15W	20W	20W	20W	25W	25W	25W
Catalog #	Low Lumens			Mid Lumens			High Lumens		
SW5-K-4X1L-QT-MCT	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
	3930 Lm	3960 Lm	3990 Lm	4480 Lm	4515 Lm	4550 Lm	5490 Lm	5535 Lm	5580 Lm
	30W	30W	30W	35W	35W	35W	45W	45W	45W

PHOTOMETRICS

SW5-K-2X1L

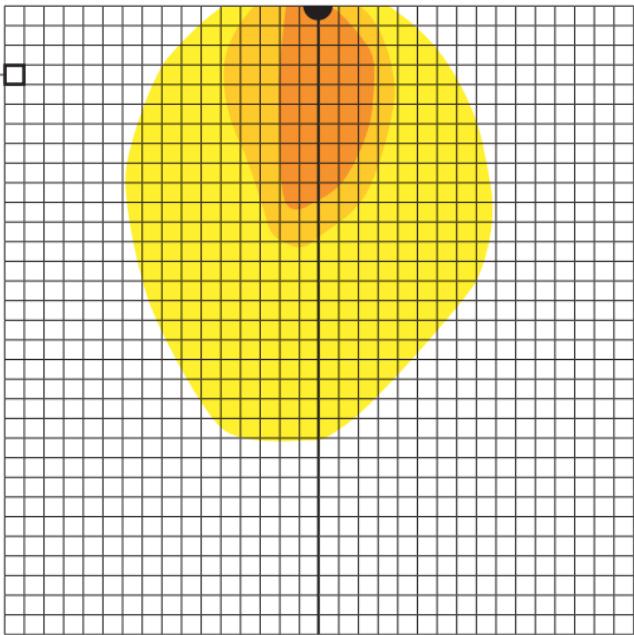

SW5-K-4X1L

