

SPECIFICATIONS

MULTI FAMILY

HOUSING

- Diecast aluminum housing
- Corrosion free powder coat
- Slim profile (.27" thick)
- White finish standard, other trim colors available

ELECTRICAL

- 12V or 24V DC available
- For use with constant voltage transformer
- Operating Temperature: -4°F - 114°F (-20°C - 45°C)

OPTICAL SYSTEM

- PMMA lens
- 300 Lumens
- Available in 27K - 50K
- CRI >80
- Beam angle: 180°

MOUNTING


- Recess mounted: 2.25" hole
- Surface mounted: ring included
- 39" split wire leads and jumper connectors for easy daisy chain

CODE COMPLIANCE

- cETLus Listed for indoor locations
- FCC Compliant

WARRANTY

- 5 Year

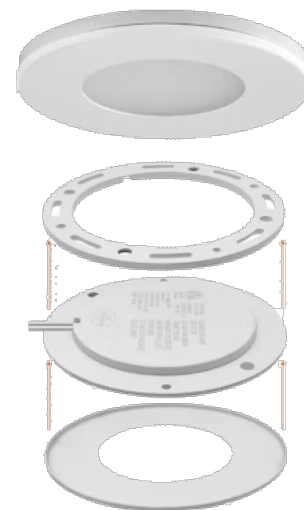

UCSD-EN Undercabinet Puck Light

ORDERING INFORMATION

MODEL#	Wattage	Voltage	CCT
UCSD-EN-12V3L-27K	3W (300 Lm)	12V	2700K
UCSD-EN-12V3L-30K	3W (300 Lm)	12V	3000K
UCSD-EN-12V3L-40K	3W (300 Lm)	12V	4000K
UCSD-EN-12V3L-50K	3W (300 Lm)	12V	5000K
UCSD-EN-24V3L-27K	3W (300 Lm)	24V	2700K
UCSD-EN-24V3L-30K	3W (300 Lm)	24V	3000K

Accessories (order separately)

UCSD-EN-BZ	- Bronze Trim (white standard)
UCSD-EN-BK	- Black Trim (white standard)
UCSD-EN-SL	- Silver Trim (white standard)
UCSD-EN-BN	- Brushed Nickel Trim (white standard)
UCSD-EN-CP	- Copper Trim (white standard)
ET-EN-12V12W	- Electronic Transformer (non-dimmable) - connects to wall outlet
CT-EN-12V20W	- Constant Voltage Transformer, hardwire
CT-EN-12V60W	- Constant Voltage Transformer, hardwire
CT-EN-12V150W	- Constant Voltage Transformer, hardwire
CT-EN-24V-60W	- Constant Voltage Transformer, hardwire

