

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing
- Dark bronze powdercoat finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 277-480V also available
- 1-10vdc dimmable driver standard, provides continuous dimming to 10%
- Operating Temperature: -40°F (-40°C) - 113°F (45°C)

OPTICAL SYSTEM

- Polycarbonate Lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 149,000 hours @ L₇₀
- CRI: 80
- Power Factor > 0.90
- THD <20%
- Available in 4000K and 5000K
- Types III and V available

MOUNTING

- Yoke mount, trunnion bracket, arm mount, and slipfitter available
- Bullhorns available

CODE COMPLIANCE



- cULus Listed for Wet Locations
- Meets UL Requirements
- IP66 Rated
- Meets DLC Premium Requirements

WARRANTY

- 5 Year



VLAL31-B Multi-Purpose Area Light

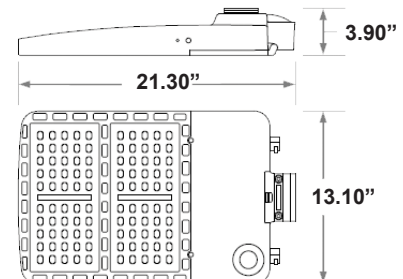

CATALOG #	Lumens	Wattage	Color	
VLAL31-B-100L-QT-40K-*	13,300	100W	4000K	
VLAL31-B-100L-QT-50K-*	13,300	100W	5000K	
VLAL31-B-150L-QT-40K-*	19,500	149W	4000K	
VLAL31-B-150L-QT-50K-*	19,500	149W	5000K	
VLAL31-B-200L-QT-40K-*	26,000	203W	4000K	
VLAL31-B-200L-QT-50K-*	26,000	203W	5000K	
VLAL31-B-230L-QT-40K-*	31,000	235W	4000K	
VLAL31-B-230L-QT-50K-*	31,000	235W	5000K	
VLAL31-B-290L-QT-40K-*	39,000	297W	4000K	
VLAL31-B-290L-QT-50K-*	39,000	297W	5000K	

*Specify T3, T5

Options on 2nd Page

OPTIONS (factory installed)

480V	- 277V - 480V
PCRN	- NEMA Photocell Receptacle <i>ships with shorting cap (photocell ships separately)</i>
10YR	- Ten year Warranty

ACCESSORIES (order separately, ships on side)

VLAL31-B-AY	- Yoke Mount
VLAL31-B-SB	- Trunnion Mount
VLAL31-B-ARMS	- Arm Mount - Square Pole
VLAL31-B-ARMR	- Arm Mount - round Pole
VLAL31-B-SF	- Slipfitter
VLAL31-B-WMB	- Wall Mounting Bracket
VLAL31-B-WMB90	- 90° Wall Mounting Bracket
VLAL31-B-BH2-180*	- 180° Double Bullhorn
VLAL31-B-BH3-180*	- 180° Triple Bullhorn
VLAL31-B-BH4-180*	- 180° Quadruple Bullhorn
PC-B-NEMA	- NEMA Photocell

**Requires slipfitter*