

SPECIFICATIONS

INDOOR

HOUSING

- Aluminum frame and steel housing backplate
- Available in 1X4, 2x2 and 2x4 models

ELECTRICAL

- Quad-Tap (120-277Vac)
- 0-10V Dimmable driver standard
- Operating Temperature: -20°C (-4°F) - 40°C (104°F)

OPTICAL SYSTEM

- PMMA LED lenses for optimal light distribution
- Available in 3500K, 4000K and 5000K
- 144,000 hours @ L₇₀
- CRI > 80
- THD < 20%
- Power Factor > 0.90

MOUNTING

- Standard mounting options include recessed in grid ceilings or suspended mounting using attached hanging brackets
- Surface mount, flange mounting, and cable mounting also optional
- Earthquake clips standard

CODE COMPLIANCE

- cULus Listed for Damp Locations
- RoHS Compliant
- Meets DLC Requirements

WARRANTY

- 5 Year

ORDERING INFORMATION

CATALOG #	Size	Wattage	Lumens	Color	DLC Listing
VLFP9-BL-14-32L-QT-35K	1x4	32W	4,124	3500K	DLC Premium
VLFP9-BL-14-32L-QT-40K	1x4	32W	4,147	4000K	DLC Premium
VLFP9-BL-14-32L-QT-50K	1x4	32W	4,169	5000K	DLC Premium
VLFP9-BL-22-32L-QT-35K	2x2	32W	4,174	3500K	DLC Premium
VLFP9-BL-22-32L-QT-40K	2x2	32W	4,234	4000K	DLC Premium
VLFP9-BL-22-32L-QT-50K	2x2	32W	4,293	5000K	DLC Premium
VLFP9-BL-22-36L-QT-35K	2x2	36W	4,259	3500K	DLC Standard
VLFP9-BL-22-36L-QT-40K	2x2	36W	4,354	4000K	DLC Standard
VLFP9-BL-22-36L-QT-50K	2x2	36W	4,449	5000K	DLC Standard
VLFP9-BL-24-40L-QT-35K	2x4	40W	5,274	3500K	DLC Premium
VLFP9-BL-24-40L-QT-40K	2x4	40W	5,330	4000K	DLC Premium
VLFP9-BL-24-40L-QT-50K	2x4	40W	5,385	5000K	DLC Premium
VLFP9-BL-24-43L-QT-35K	2x4	43W	5,240	3500K	DLC Standard
VLFP9-BL-24-43L-QT-40K	2x4	43W	5,282	4000K	DLC Standard
VLFP9-BL-24-43L-QT-50K	2x4	43W	5,323	5000K	DLC Standard
VLFP9-BL-24-55L-QT-35K	2x4	55W	7,217	3500K	DLC Premium
VLFP9-BL-24-55L-QT-40K	2x4	55W	7,330	4000K	DLC Premium
VLFP9-BL-24-55L-QT-50K	2x4	55W	7,442	5000K	DLC Premium

OPTIONS (Ships Installed)

EBLED5W*	-	LED Emergency Ballast
EBLED8W*	-	LED Emergency Ballast
EBLED11W*	-	LED Emergency Ballast
EBLED14W*	-	LED Emergency Ballast
EBLED17W*	-	LED Emergency Ballast

***Add T20 for driver to be Title20 CEC compliant**

Integral EM Ballasts only available with 2x2 and 2x4 models

See page 3 for emergency ballast info



ACCESSORIES (Order Separately, Ships on Side)

VLFP9-BL-SMK14	-	1x4 Surface Mount Kit
VLFP9-BL-SMK22	-	2x2 Surface Mount Kit
VLFP9-BL-SMK24	-	2x4 Surface Mount Kit
VLFP9-BL-DWK14	-	1x4 Flange Mount Kit
VLFP9-BL-DWK22	-	2x2 Flange Mount Kit
VLFP9-BL-DWK24	-	2x4 Flange Mount Kit
VLFP9-B-CMK	-	Cable Mount Kit
		6, 1-meter long, 1/16" diameter with spring clips and adjustable locking ceiling attachment
EBCP-LED-5W	-	Remote Mount LED EM Ballast
EBCP-LED-8W	-	Remote Mount LED EM Ballast
EBCP-LED-11W	-	Remote Mount LED EM Ballast
EBCP-LED-14W	-	Remote Mount LED EM Ballast
EBCP-LED-17W	-	Remote Mount LED EM Ballast





VLFP9-B LED Back-Lit Panel



VLFP9-BL-14-32L-QT-50K

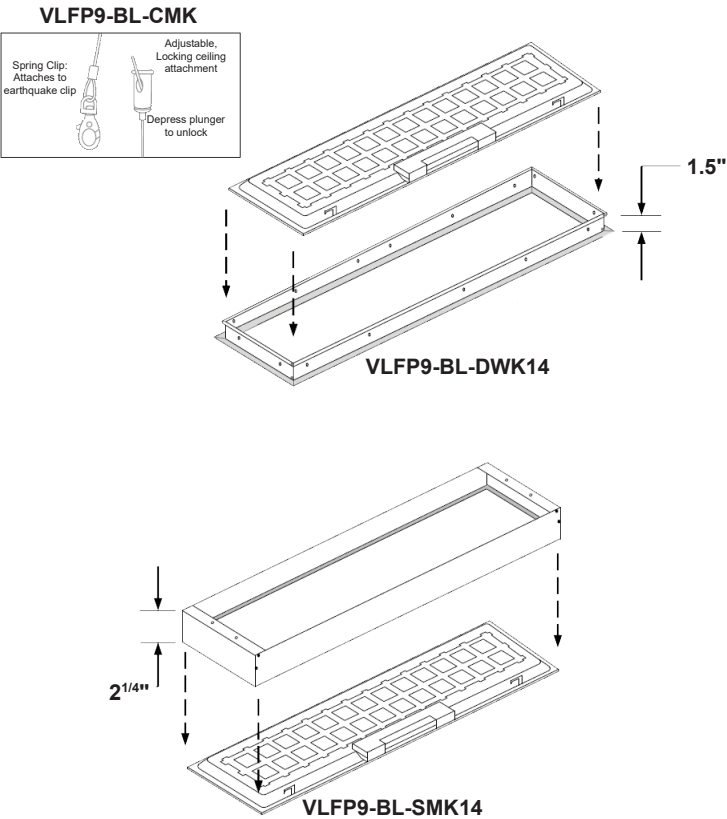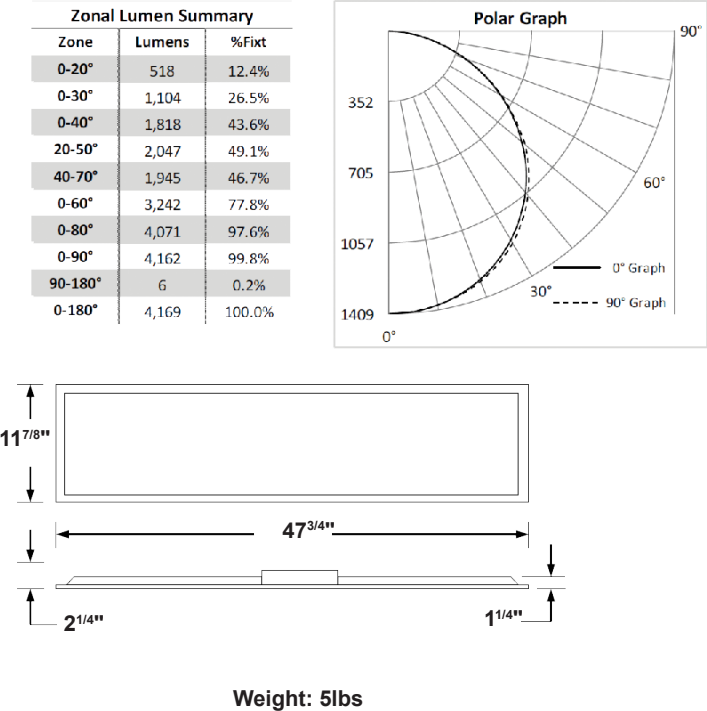

VLFP9-BL-22-32L-QT-50K

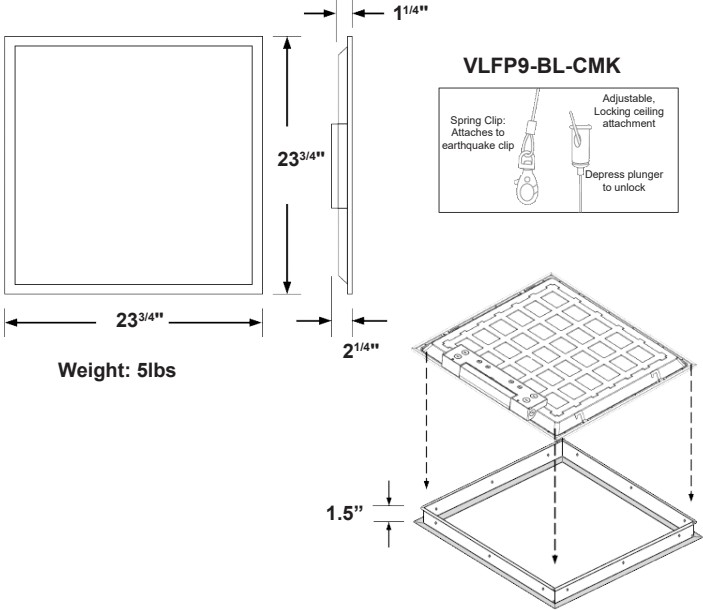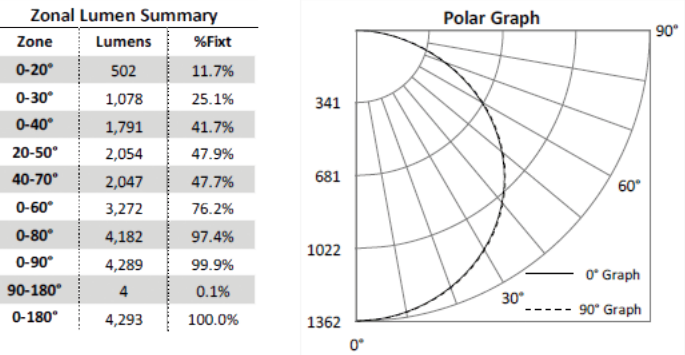


VLFP9-BL-22-36L-QT-50K

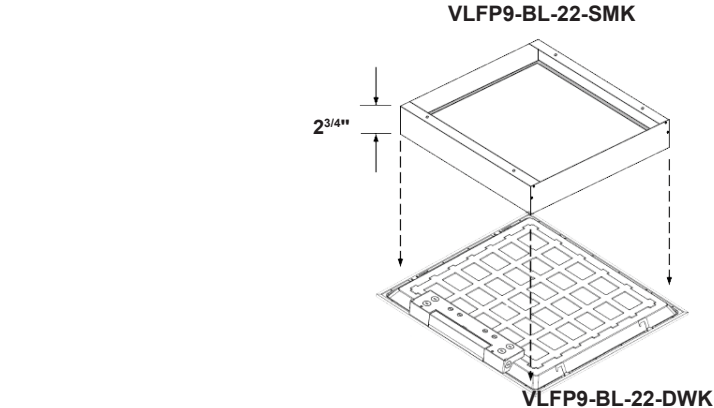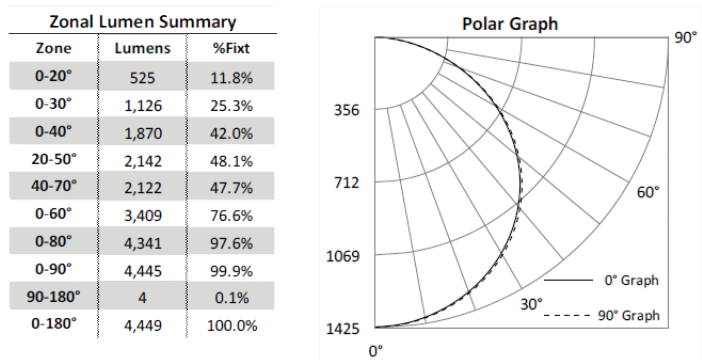


VLFP9-BL-24-40L-QT-50K

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20°	663	12.3%
0-30°	1,418	26.3%
0-40°	2,338	43.4%
20-50°	2,638	49.0%
40-70°	2,518	46.8%
0-60°	4,181	77.6%
0-80°	5,258	97.6%
0-90°	5,379	99.9%
90-180°	6	0.1%
0-180°	5,385	100.0%

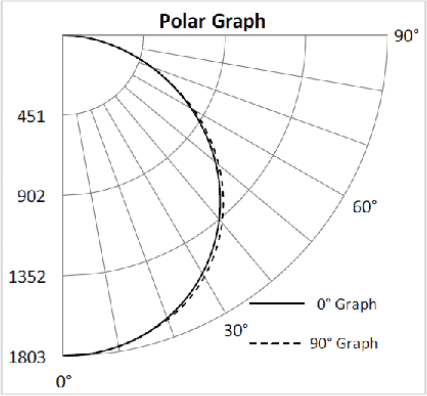


VLFP9-BL-24-43L-QT-50K

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20°	658	12.4%
0-30°	1,406	26.4%
0-40°	2,318	43.5%
20-50°	2,615	49.1%
40-70°	2,491	46.8%
0-60°	4,143	77.8%
0-80°	5,202	97.7%
0-90°	5,318	99.9%
90-180°	6	0.1%
0-180°	5,323	100.0%



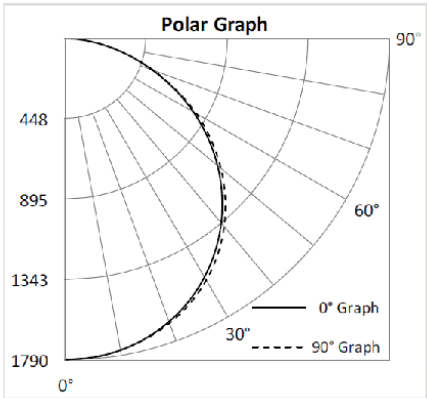


VLFP9-BL-24-55L-QT-50K

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20°	922	12.4%
0-30°	1,970	26.5%
0-40°	3,247	43.6%
20-50°	3,661	49.2%
40-70°	3,485	46.8%
0-60°	5,799	77.9%
0-80°	7,276	97.8%
0-90°	7,434	99.9%
90-180°	8	0.1%
0-180°	7,442	100.0%

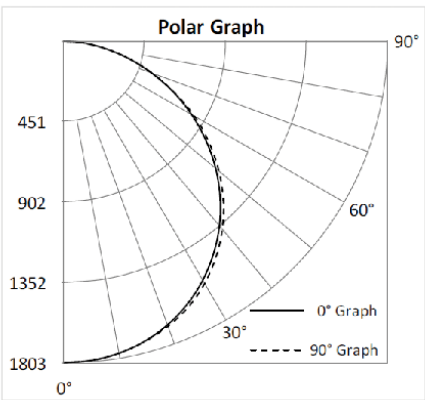

VLFP9-BL-CMK

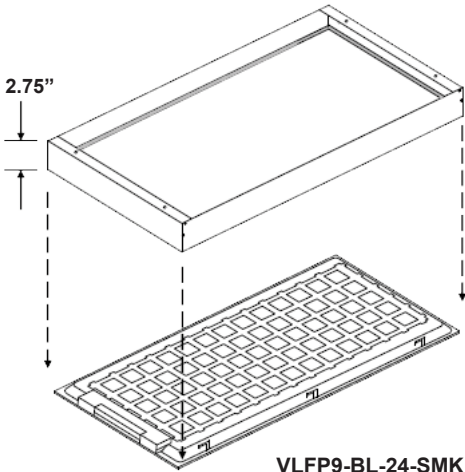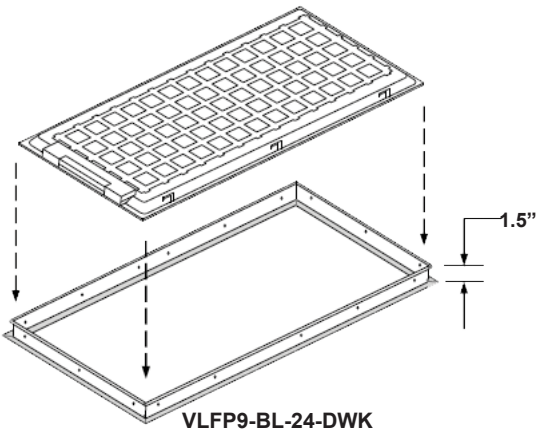

Emergency Ballast	EBLED5W		EBLED8W		EBLED11W		EBLED14W		EBLED17W	
Model #	Watts	EM Lumens	Watts	EM Lumens	Watts	EM Lumens	Watts	EM Lumens	Watts	EM Lumens
VLFP9-BL-14-32L	5W	640	7.8W	998	10.7W	1370	13.7W	1754	17W	2176
VLFP9-BL-22-32L	5W	645	7.8W	1006	10.7W	1380	13.7W	1767	17W	2193
VLFP9-BL-22-36L	5W	590	7.8W	920	10.7W	1263	13.7W	1617	17W	2006
VLFP9-BL-24-40L	5W	655	7.8W	1022	10.7W	1402	13.7W	1795	17W	2227
VLFP9-BL-24-44L	5W	600	7.8W	936	10.7W	1284	13.7W	1644	17W	2040
VLFP9-BL-24-55L	5W	655	7.8W	1022	10.7W	1402	13.7W	1795	17W	2227