

SPECIFICATIONS

HIGHBAYS

HOUSING

- Painted steel housing
- Lamps rotate up to 135°
- Easy installation in new or retrofit applications

ELECTRICAL

- Quad Tap (QT) - 120 - 277V
- 0-10V dimmable driver standard
- Power Factor > .90
- THD < 20%
- Operating Temperature: -40°C (-40°F) - 50°C (122°F)

OPTICAL SYSTEM

- Frosted PMMA lens
- 174,000 Hours @ L₇₀
- CRI: 80

MOUNTING

- Chain mounting kits (includes v-hooks, and 1/8" thick, 1-meter long chain) provided standard
- Pendant and surface mounting kits optional

CODE COMPLIANCE

- cULus Listed for Damp Locations
- DLC Listed
- RoHS Compliant
- FCC Part 15, class A Compliant

WARRANTY

- 5 Year



VLHBLEDA1 Adjustable LED Highbay

ORDERING INFORMATION


MODEL#	Wattage	Driver	Color Temp
VLHBLEDA1-B	109L	QT	40K
	166L		50K
	217L		

OPTIONS (Factory Installed)

- OCS - Passive Infrared Occupancy Sensor
- MOCS - Microwave Sensor

ACCESSORIES (Order Separately, Ships on Side)

- VLHBLEDA1-WG1 - Wire Guard for 109W and 166W models
- VLHBLEDA1-WG2 - Wire Guard for 217W models
- VLHBLEDA1-PMK - Pendant Mount Kit
- VLHBLEDA1-SMK - Surface Mount Kit

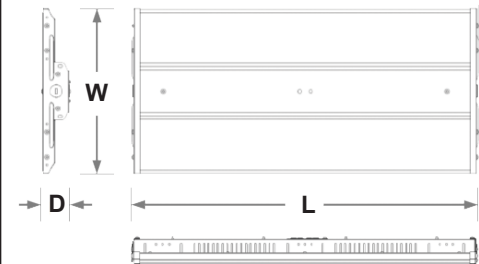

Model	Length	Width	Depth	Weight
109L	26"	12"	2"	7.7lbs
166L	26"	12"	2"	9.0lbs
217L	26"	14"	2"	10.0lbs

LUMEN INFORMATION

Catalog #	VLHBLEDA1-B-109L		VLHBLEDA1-B-166L		VLHBLEDA1-B-217L	
VLHBLEDA1-B	4000K	5000K	4000K	5000K	4000K	5000K
	15,297 Lm	15,471 Lm	22,970 Lm	23,223 Lm	30,394 Lm	30,742 Lm
	109W	109W	166W	166W	217W	217W

ELECTRICAL INFORMATION

Catalog #	Input Amps (A)		
	120V	240V	277V
VLHBLEDA1-B-109L (40K)	0.91	0.45	0.39
VLHBLEDA1-B-109L(50K)	0.91	0.45	0.39
VLHBLEDA1-B-109L (40K)	1.38	0.69	0.60
VLHBLEDA1-B-109L (50K)	1.38	0.69	0.60
VLHBLEDA1-B-109L (40K)	1.81	0.90	0.78
VLHBLEDA1-B-109L (50K)	1.81	0.90	0.78