

SPECIFICATIONS

OUTDOOR

HOUSING

- Durable die-cast aluminum housing
- Powder coated dark bronze finish

ELECTRICAL

- QT (120-277V)
- 0-10V Dimming
- Operating Temperature: -40°C - 45°C (-40°F - 113°F)
- 4kV Surge Protection
- Power factor >.90
- THD <20%
- Built in Photocell (can be turned on or off)
- 151,000 hours @ L₇₀

OPTICAL SYSTEM

- Polycarbonate frosted lens
- MCT: Selectable between 3000K/4000K/5000K
- CRI > 70

MOUNTING

- Knuckle mount kit standard (Fit 1/2" NPT)
- Optional line voltage ground stake
- Optional round canopy mount for surface mount
- Easy installation in new construction or retrofit

CODE COMPLIANCE

- cULus Listed for Wet Locations
- DLC Premium Listed
- FCC Compliant
- IP65

WARRANTY

- 5 Year



VLLD8-B


Color and Wattage Selectable LED Landscape Flood

ORDERING INFORMATION

CATALOG#	Wattage	Lumens	CCT
VLLD8-B-1L-QT-MCT	20W / 25W / 33W	3000 / 3700 / 4500 Lms	30K/40K/50K

ACCESSORIES (Order Separately)

- VL-B-CPY** - Round Canopy Mounting Plate
- VL-B-STK** - Line Voltage Ground Stake

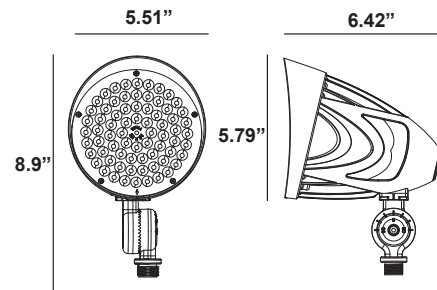

LUMEN INFORMATION

Catalog #	Lumens								
VLLD-8-B-1L-QT-MCT	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
	2,999 Lm	3,187 Lm	22,970 Lm	3,707 Lm	4,008 Lm	4,077 Lm	4,564 Lm	5,064 Lm	4,766 Lm
	20.39W	19.76W	20.39W	26.46W	25.42W	26.52W	35.1W	33.28W	34.86W

Catalog #	Input Amps (A)								
	Low Lumens			Mid Lumens			High Lumens		
	120V	240V	277V	120V	240V	277V	120V	240V	277V
VLLD8-B-1L-QT-MCT (30K)	0.17	0.08	0.07	0.22	0.11	0.10	0.29	0.15	0.13
VLLD8-B-1L-QT-MCT (40K)	0.16	0.08	0.07	0.21	0.11	0.09	0.28	0.14	0.12
VLLD8-B-1L-QT-MCT (50K)	0.17	0.08	0.07	0.22	0.11	0.10	0.29	0.15	0.13