

SPECIFICATIONS

OUTDOOR

HOUSING

- Cast aluminum housing
- Dark bronze powdercoat finish
- Internal switch allows for down light or up/down light

ELECTRICAL

- 120V
- 153,000 hours @ L₇₀
- 1kV Surge Protection
- Power factor > .90

OPTICAL SYSTEM

- Glass lens
- Available in 3000K, 4000K, and 5000K
- CRI ≥ 80
- 30W

MOUNTING

- Easy installation in new construction or retrofit applications

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- FCC Compliant
- RoHS Compliant
- Energy Star Qualified

WARRANTY

- 5 Year




VLOC6-B
LED Up/Down
Wall Cylinder

ORDERING INFORMATION

CATALOG

VLOC6-B-30L-120V*

**Specify 30K, 40K, or 50K*

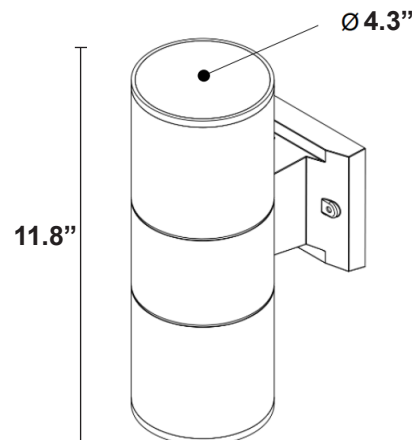

LUMEN INFORMATION

Catalog #	Low Lumens		
VLOC6-B-30L	3000K	4000K	5000K
	2,446 Lm	2,467 Lm	2,509 Lm
	30W	30W	30W

PHOTOMETRICS

VLOC6-B-30L-120V-50K


Luminaire Data

Description	Up/Down Cylinder, 3K
Total Lumens	2,509
Input Wattage	30
Efficacy (lm/W)	82
Beam Angle	H=45.1, V=45.1
Field Angle	H=86.9, V=86.9

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	506	20.2%
0-30°	858	34.2%
0-40°	1,131	45.1%
0-60°	1,243	49.6%
0-80°	1,253	49.9%
0-90°	1,254	50.0%
90-180°	1,254	50.0%
0-180°	2,509	100.0%

Cone of Light



M.H.	F.C.	Width
4'	109	3.3'
6'	48	5.0'
8'	27	6.6'
10'	17	8.3'
12'	12	10.0'
14'	9	11.6'
16'	7	13.3'

Candela Table (lm)

0°	1,746
10°	1,512
20°	997
30°	589
40°	277
50°	22
60°	6
70°	4
80°	4
90°	0
100°	4
110°	4
120°	6
130°	22
140°	277
150°	589
160°	997
170°	1,512
180°	1,745

Polar Graph

