

SPECIFICATIONS

OUTDOOR

HOUSING

- Cast aluminum housing
- Dark bronze powdercoat finish
- Internal switch allows for down light or up/down light

ELECTRICAL

- 120V
- 153,000 hours @ L₇₀
- 1kV Surge Protection

OPTICAL SYSTEM

- Glass lens
- Offered in 30K, 40K, or 50K
- CRI>80

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- EnergyStar Listed
- RoHS Compliant
- FCC Compliant

WARRANTY


- 5 Year



VLOC6-B-MCT LED Up/Down Wall Cylinder

ORDERING INFORMATION

CATALOG #	Wattage	Driver	CCT
VLOC6-B	30L (30W)	120V	30K
			40K
			50K

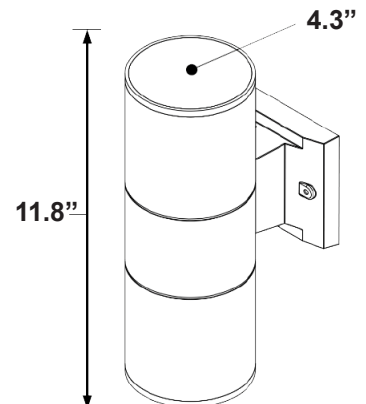


LUMEN INFORMATION

Catalog #	Low Lumens		
VL0L6-B-30L	3000K	4000K	5000K
	2446 Lm	2467 Lm	2509 Lm
	30W	30W	30W

PHOTOMETRICS

Luminaire Data	
Description	Up/Down Cylinder, 3K
Total Lumens	2,509
Input Wattage	30
Efficacy (lm/W)	82
Beam Angle	H=45.1, V=45.1
Field Angle	H=86.9, V=86.9

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20°	506	20.2%
0-30°	858	34.2%
0-40°	1,131	45.1%
0-60°	1,243	49.6%
0-80°	1,253	49.9%
0-90°	1,254	50.0%
90-180°	1,254	50.0%
0-180°	2,509	100.0%

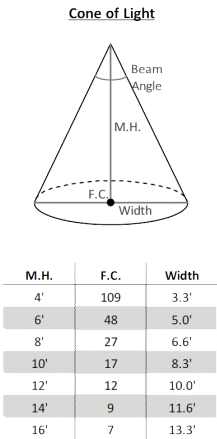

Candela Table (lm)	
0°	1,746
10°	1,512
20°	997
30°	589
40°	277
50°	22
60°	6
70°	4
80°	4
90°	0
100°	4
110°	4
120°	6
130°	22
140°	277
150°	589
160°	997
170°	1,512
180°	1,745

