

SPECIFICATIONS

INDOOR

HOUSING

- 4" and 6" Modules
- Powder-coat
- White aluminum housing
- Easy installation in new construction or retrofit applications

ELECTRICAL

- Triac Dimmable
- 120V
- 60Hz
- Power Factor > 0.90

ILLUMINATION

- 5CT - Selectable between 27K/30K/35K/40K/50K
- 174,000 Hours @ L₇₀
- CRI > 90
- Polycarbonate diffuser
- Gimbal, max, tilts angle 60° and swivels a full 360°

CODE COMPLIANCE

- cETLus Listed for Damp Locations
- Energy Star Rated
- FCC Part 15, class B Compliant
- Title 24 Compliant


WARRANTY

- 5 Year warranty



VLRCAN-PA2-5CT

Gimbal Downlight
LED Trim
Kelvin Selectable

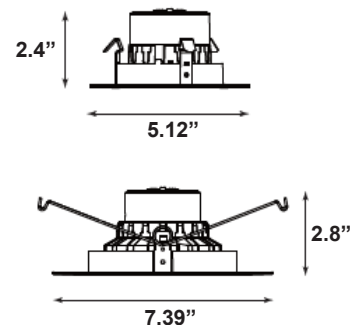

ORDERING INFORMATION

CATALOG#	Size	Lumens	CCT
VLRCAN4-PA2-DIM-120V-5CT	4"	700 Lumens	27K/ 30K/ 35K/ 40K/ 50K
VLRCAN6-PA2-DIM-120V-5CT	6"	1000 Lumens	27K/ 30K/ 35K/ 40K/ 50K