

## SPECIFICATIONS

MULTI FAMILY

### HOUSING

- Heavy Duty aluminum body for enhanced heat dissipation
- Fits square and octagonal junction boxes with disconnect screw-in base lead to easily adapt to standard incandescent sockets

### ELECTRONIC

- Dimmable to 5% with most dimmers
- 120/277Vac
- Operating Temperature: -30°C - 40°C (-22°F - 104°F)

### ILLUMINATION

- Available in 3000K
- 50,000 Hours @ L70
- 4" Can - Less JBox = 10.5W (700 Lumens)
- 5"/6" Can - Less JBox = 12.5W (825 Lumens)
- CRI  $\geq$  90

### CODE COMPLIANCE

- cULus Listed for Wet Locations
- Energy Star Qualified
- Meets California Title 24 requirements
- RoHS compliant

### WARRANTY

- 5 Year Warranty




## VLSD2-B LED Surface Dome Light



Can  
Installation



J Box  
Installation

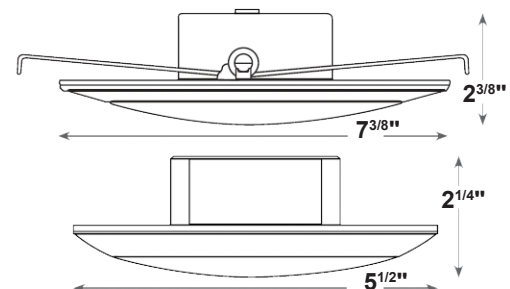

### Ordering Information

CATALOG#	Surface	Wattage	Lumens	Color
VLSD2-B-10L-QT-30K	4"	10.5W	700	3000K
VLSD2-B-12L-QT-30K	5/6"	12.5W	825	3000K