

SPECIFICATIONS

MULTI-FAMILY

HOUSING

- Steel housing
- Brushed nickel finish
- Available in three housing sizes
- Surface mounting and retrofit installation
- Covered ceiling mount

ELECTRICAL

- 120V, 60hz
- TRIAC Dimmable
- Power Factor > 0.9
- 0.5kV Surge Protector

OPTICAL SYSTEM

- Plastic diffuser
- 1,200-2,000 Lumens
- 139,000 hours @ L₇₀
- Color Selectable in field between 2700K - 5000K
- CRI ≥ 90

CODE COMPLIANCE

- cETLus Listed for Damp Locations
- FCC Compliant

WARRANTY

- 5 Year


Recommended Dimmers	
Manufacturer	Model#
Lutron	TG-600PR-WH
Lutron	SLV-600P-AL
Lutron	DVCL-153P
Lutron	S-600PR-WH
Lutron	DV-600PR-WH
Lutron	MSCL-OP153M
Lutron	CTCL-153PDH-WH
Lutron	SCL-153PH-WH
Lutron	PD-6WCL
Lutron	TGCL-153PH-LA
Lutron	GT-600P
Lutron	MACL-153M/MA-R
Leviton	6672
Leviton	6674
Leviton	IPL06
Leviton	RNL06
Leviton	DSL06

ORDERING INFORMATION

CATALOG #	Description
VLSR5-B-17L-120V-5CT	12", 17W 1200 Lumens, 120V, Selectable 2700K - 5000K
VLSR5-B-22L-120V-5CT	14", 22W, 1800 Lumens, 120V, Selectable 2700K - 5000K
VLSR5-B-26L-120V-5CT	16", 26W, 2000 Lumens, 120V, Selectable 2700K - 5000K



VLSR5-B-5CT CCT Selectable Ceiling Mount

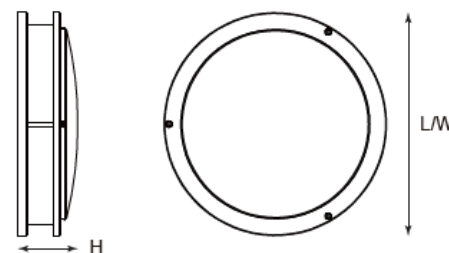

Model	L (in)	W (in)	H (in)
17L	11.81	11.81	3.54
22L	13.78	13.78	3.54
26L	15.75	15.75	3.54