

SPECIFICATIONS

INDOOR

FEATURES


- Painted steel housing
- Rocker switch standard
- White housing
- Polycarbonate lens
- 120V
- 196,000 Hours @ L₇₀
- CRI ≥90
- Knockouts on sides and back for easy installation
- CCT Field Selectable (27K/30K/35K/40K/50K)

CODE COMPLIANCE

- cULus Listed for Damp Locations
- Energy Star Rated

WARRANTY

- 5 Year

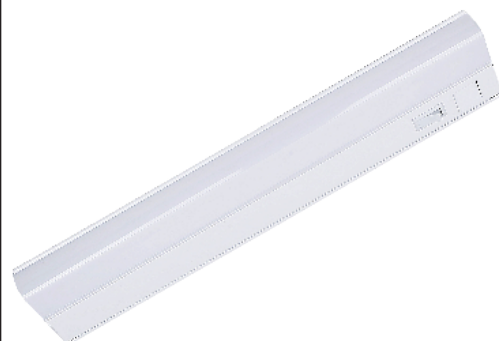

VLUC4-B-5CT

LED Color Selectable

ORDERING INFORMATION

CATALOG#	Length	Wattage	Lumens	CCT
VLUC4-B-9L-120V-5CT	9"	5W	334-412Lm	27K/30K/35K/40K/50K
VLUC4-B-12L-120V-5CT	12"	5W	390-450Lm	27K/30K/35K/40K/50K
VLUC4-B-18L-120V-5CT	18"	9W	673-770Lm	27K/30K/35K/40K/50K
VLUC4-B-21L-120V-5CT	21"	9W	665-764Lm	27K/30K/35K/40K/50K
VLUC4-B-24L-120V-5CT	24"	9W	696-803Lm	27K/30K/35K/40K/50K
VLUC4-B-33L-120V-5CT	33"	14W	1064-1245Lm	27K/30K/35K/40K/50K
VLUC4-B-42L-120V-5CT	42"	18W	1315-1543Lm	27K/30K/35K/40K/50K

