

SPECIFICATIONS

OUTDOOR

HOUSING

- Die-cast aluminum housing
- Premium powder-coat
- White finish

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 0-10V Dimmable driver standard
- 6kV Surge Protection
- 167,000 hours @ L₇₀
- Pf>.90
- THD<20%
- Operating Temperature: -40°C (-40°F) - 50°C (122°F)

OPTICAL SYSTEM

- Polycarbonate lens
- 5000K
- 11,000 lumens
- CRI >80

MOUNTING

- Recessed Mounting

CODE COMPLIANCE

- cULus Listed for Wet Locations
- IP65 Rated
- FCC Compliant

WARRANTY


- 5 Year



VLVR21-B-LED Recessed LED Canopy

ORDERING INFORMATION

CATALOG #	Wattage	Lumens	CCT
VLVR21-B-78L-QT-50K	78W	10,406	5000K

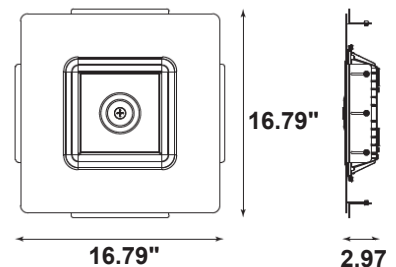

VLVR21-B-78L-QT-50K

Luminaire Data

Description	Canopy
	11,000 lumens / 5000k
Total Lumens	10,406
Input Wattage	78
Efficacy (lm/W)	133
Spacing Criterion (0-180°)	0.9
Spacing Criterion (90-270°)	0.92

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	1,444	13.9%
0-30°	2,718	26.1%
0-40°	4,081	39.2%
20-50°	4,139	39.8%
40-70°	5,149	49.5%
0-60°	7,441	71.5%
0-80°	10,204	98.1%
0-90°	10,406	100.0%
90-180°	0	0.0%
0-180°	10,406	100.0%

