

SPECIFICATIONS

OUTDOOR

HOUSING

- Die-cast aluminum housing
- Premium powder-coat
- Bronze or White finish
- Integrated photocell can be turned on or off
- Screw in sensor ready

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- 6kV Surge Protection
- 167,000 hours @ L70
- Pf>.90
- THD<20%
- Operating Temperature: -40°C (-40°F) - 45°C (113°F)

OPTICAL SYSTEM

- Polycarbonate lens
- MCT: Selectable between 3000K/4000K/5000K
- Beam angle: 135°
- CRI >80

MOUNTING

- Surface Mount

CODE COMPLIANCE

- cULus Listed for Wet Locations
- IP65 Rated
- FCC Compliant
- DLC Premium Listed

WARRANTY

- 5 Year



VLVR25-B-MCT


Wattage and Color Selectable LED Canopy

ORDERING INFORMATION

CATALOG #	Wattage	Lumens	CCT	Color
VLVR25-B-1L-QT-MCT-BZ	20W - 73W	3334 - 11,715 Lm	30K/40K/50K	Bronze
VLVR25-B-1L-QT-MCT-WH	20W - 73W	3334 - 11,715 Lm	30K/40K/50K	White

ACCESSORIES (Order Separately)

HD09VR-PH5-1	- PIR Occupancy Sensor - 5 dial setting (39' max height)
HD09VR-MH5-1	- Microwave Sensor with Step-dimming - 5 dial setting (49' max height)
HD05VR	- Remote Control for Sensors

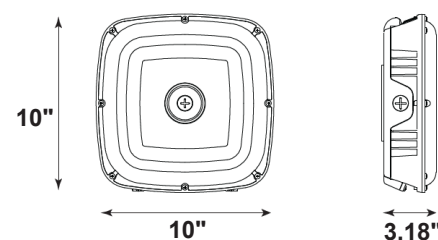

PHOTOMETRICS

VLVR25-B-1L-QT-MCT


Luminaire Data

Description	Canopy, Sensor Ready CCT and Lumen Select
Total Lumens	11,715
Input Wattage	70
Efficacy (lm/W)	167
Spacing Criterion (0-180°)	1.14
Spacing Criterion (90-270°)	1.16

Photometric calculated at
4000k and highest lumen
setting.

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	1,432	12.2%
0-30°	3,003	25.6%
0-40°	4,674	39.9%
20-50°	4,723	40.3%
40-70°	4,973	42.5%
0-60°	7,683	65.6%
0-80°	11,036	94.2%
0-90°	11,514	98.3%
90-180°	201	1.7%
0-180°	11,715	100.0%

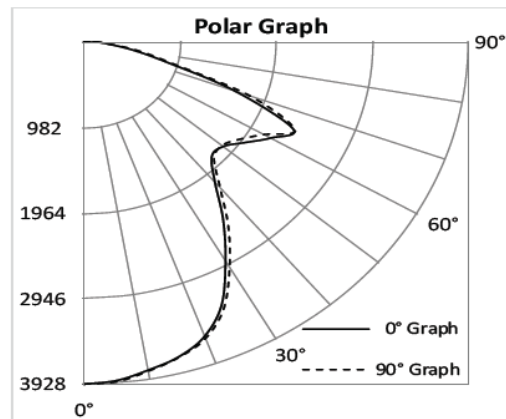

LUMEN INFORMATION

Catalog #	Lumens								
VLVR25-B-1L	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
	3334 Lm	3393 Lm	3549 Lm	4900 Lm	6500 Lm	6300 Lm	8319 Lm	8808 Lm	8892 Lm
	20W	20W	20W	39W	39W	39W	53W	52W	53W
	3000K	4000K	5000K	3000K	4000K	5000K			
	9539 Lm	10,143 Lm	10,153 Lm	10,938 Lm	11,715 Lm	11,556 Lm			
	62W	60W	62W	73W	70W	73W			