

SPECIFICATIONS

OUTDOOR

HOUSING

- Die-cast aluminum housing
- Premium powder-coat
- White finish

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- 6kV Surge Protection
- 173,000 hours @ L₇₀
- Pf>.90
- THD<20%
- Operating Temperature: -40°C (-40°F) - 45°C (113°F)

OPTICAL SYSTEM

- Polycarbonate lens
- 5000K
- CRI >80

MOUNTING

- Surface Mount

CODE COMPLIANCE

- cULus Listed for Wet Locations
- IP65 Rated
- FCC Compliant

WARRANTY


- 5 Year



VLVR26-B Wattage Selectable High Lumen LED Canopy

ORDERING INFORMATION

CATALOG #	Wattage	Lumens	CCT
VLVR26-B-1L-QT-50K	120W/140W/177W	19,553/ 22,366/ 27,385 Lm	5000K

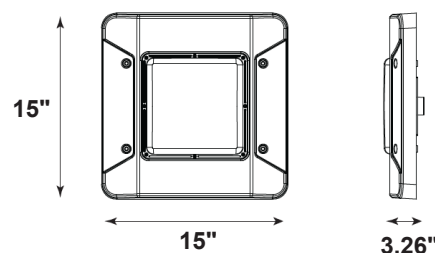

VLVR26-B-1L-QT-50K

Luminaire Data

Description	High Lumen Canopy 5K, Lumen Selectable
Total Lumens	27,385
Input Wattage	177
Efficacy (lm/W)	154
Spacing Criterion (0-180°)	1.28
Spacing Criterion (90-270°)	1.3

*Photometric calculated at
highest lumen setting.*

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	3,425	12.5%
0-30°	7,319	26.7%
0-40°	12,071	44.1%
20-50°	13,579	49.6%
40-70°	12,464	45.5%
0-60°	21,364	78.0%
0-80°	26,280	96.0%
0-90°	26,964	98.5%
90-180°	421	1.5%
0-180°	27,385	100.0%

