

SPECIFICATIONS

OUTDOOR

HOUSING

- Cast aluminum housing
- Dark bronze powdercoat finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- One 1/2" NPT threaded openings
- New construction or retrofit applications

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- Operating Temperature: -20°C (-4°F) - 50°C (122°F)
- 156,000 hours @ L₇₀
- 4kV Surge Protection
- Power factor > 0.9
- THD <20%

OPTICAL SYSTEM

- Diffused polycarbonate lens
- Integral photocell standard
- MCT (Selectable between 30K/40K/50K)
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI>80

CODE COMPLIANCE


- cULus Listed for Wet Locations
- IP65 Rated
- DLC Premium Approved
- FCC Part 15, class B

WARRANTY

- 5 Year



VLWP61.5-B
LED Wall Pack

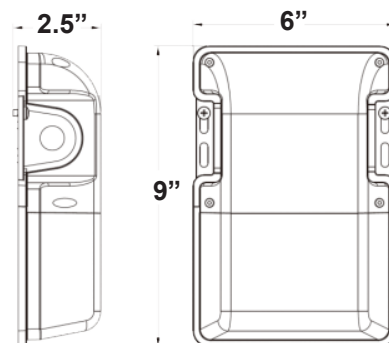

ORDERING INFORMATION

CATALOG #	Wattage	Lumens	CCT
VLWP61.5-B-1L-QT-MCT	14W - 24W	1939 - 3327 Lm	30K/40K/50K

LUMEN INFORMATION

Catalog #	Low Lumens			Mid Lumens			High Lumens		
VLWP61.5-B-1L	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
	1939 Lm	2090 Lm	2105 Lm	2496 Lm	2709 Lm	2711 Lm	3070 Lm	3327 Lm	3325 Lm
	15W	14W	15W	19W	19W	19W	24W	24W	24W

ELECTRICAL INFORMATION

Catalog #	Input Amps (A)								
	Low Lumens			Mid Lumens			High Lumens		
	120V	240V	277V	120V	240V	277V	120V	240V	277V
VLWP61.5-B-1L (30K)	0.13	0.06	0.05	0.16	0.08	0.07	0.20	0.10	0.09
VLWP61.5-B-1L (40K)	0.12	0.06	0.05	0.16	0.08	0.07	0.20	0.10	0.09
VLWP61.5-B-1L (50K)	0.13	0.06	0.05	0.16	0.08	0.07	0.20	0.10	0.09


PHOTOMETRICS

VLWP61.5-B-MCT

Luminaire Data	
Description	Economy Wall Pack
Total Lumens	3,325
Input Wattage	24
Efficacy (lm/W)	137
Max. Cd.	914.57 (360H, 24V)
IES Classification	Type IV
Longitudinal Classification	Very Short

Zonal Lumen Summary		
Zone	Lumens	%Fxt
0-30°	532	16.0%
0-60°	1,686	50.7%
0-80°	2,433	73.2%
80-90°	273	10.1%*
0-90°	2,705	81.4%
90-110°	353	10.6%
110-180°	0	0.0%
0-180°	3,325	100.0%

Luminaire Classification Systems (LCS)			
LCS Zone		Lumens	%Lum
FL	0-30	340	10.2%
FM	30-60	887	26.7%
FH	60-80	634	19.1%
FVH	80-90	239	7.2%
BL	0-30	192	5.8%
BM	30-60	267	8.0%
BH	60-80	112	3.4%
BVH	80-90	34	1.0%
UL	90-100	205	6.2%
UH	100-180	415	12.5%
Total		3,325	99.9%
BUG Rating		B1 U3 G3	

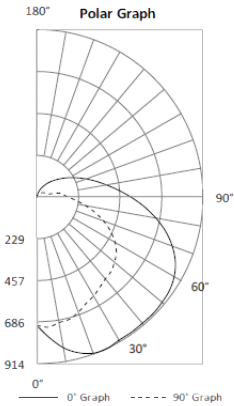

* 80-90° glare zone is calculated by dividing the lumens in that zone by the lumen total in the 0-90° zone