

SPECIFICATIONS

INDOOR

HOUSING

- Diecast aluminum housing
- Steel wireguard
- Powder-coat Silver-gray finish
- Housing can rotate from 0° - 90°

ELECTRICAL

- Quad Tap (QT) - 120-277V, 50/60Hz
- 4KV Protection
- Operating Temperature: -40°C (-40°F) - 40°C(104°F)

OPTICAL SYSTEM

- UV Stabilized polycarbonate globe
- 30W
- 2400 Lumens (3000K), 2600 Lumens (4000K)
- CRI≥90
- 54,000 hrs @L₇₀

MOUNTING

- Can be ceiling or wall mounted
- 1/2" Conduit entry on four sides
- Mounts to a standard 3 1/2" or 4" JBox

CODE COMPLIANCE


- cULus Listed for Wet Locations
- IP65

WARRANTY

- 5 Year



VP3-E LED Adjustable Vapor Proof

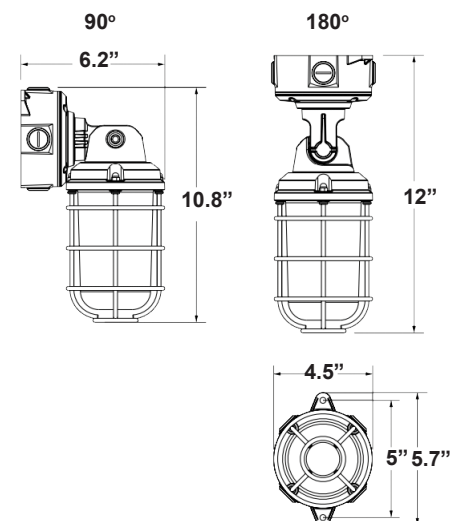

ORDERING INFORMATION

CATALOG#	Dimensions
VP3-E-30L-QT-30K	30W, 120-277V, 2400 Lumens, 3000K
VP3-E-30L-QT-40K	30W, 120-277V, 2600 Lumens, 4000K