

## SPECIFICATIONS

OUTDOOR

### HOUSING

- Heavy duty die cast aluminum housing
- Textured architectural white powdercoat finish
- Nickel-plated stainless steel hardware

### ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 0-10V Dimmable driver standard
- 347-480V driver optional
- Operating Temperature: -40°C (-40°F) - 50°C (122°F)

### OPTICAL SYSTEM

- Tempered clear flat glass lens
- 187,000 hours @ L<sub>70</sub>
- CRI >80
- Power Factor > .9
- THD < 20%
- Type V

### ILLUMINATION

- 112W (127 system watts)
- ~250W HID

### MOUNTING

- Recessed mount (accessible ceilings only)

### CODE COMPLIANCE

- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP66 Rated
- Assembled in USA available
- Meets DLC Requirements

### WARRANTY

- 5 Year
- 10 Year Warranty available




## VR11-Q-LED Recessed LED Canopy Light

## ORDERING INFORMATION



CATALOG #	Lumens	Distribution	Color
VR11-Q-112L-QT-50K	17,904	Type V	5000K

### OPTIONS

SGF	- Single Fusing
DBF	- Double Fusing
SGP	- Surge Protection
480V	- 347-480V Driver
CC	- Custom Color
10YR	- 10 Year Warranty
USA	- Assembled in USA

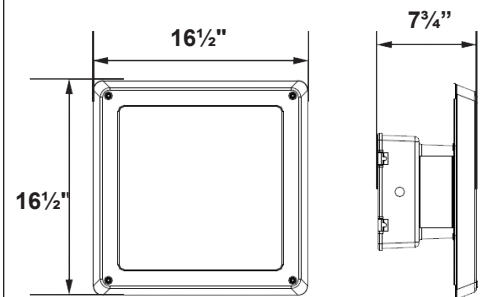

## PHOTOMETRICS

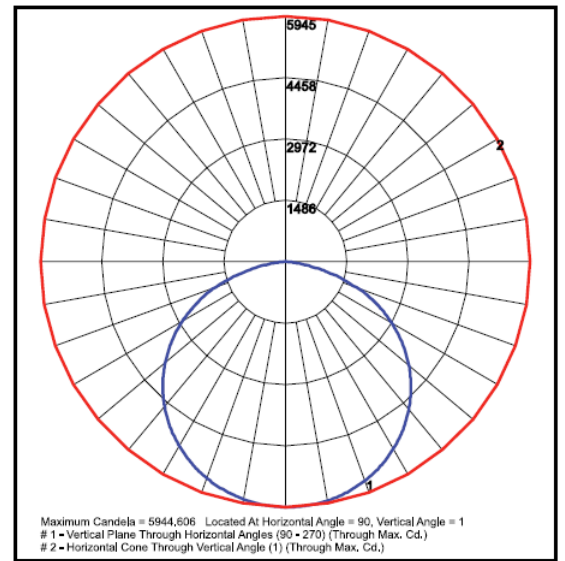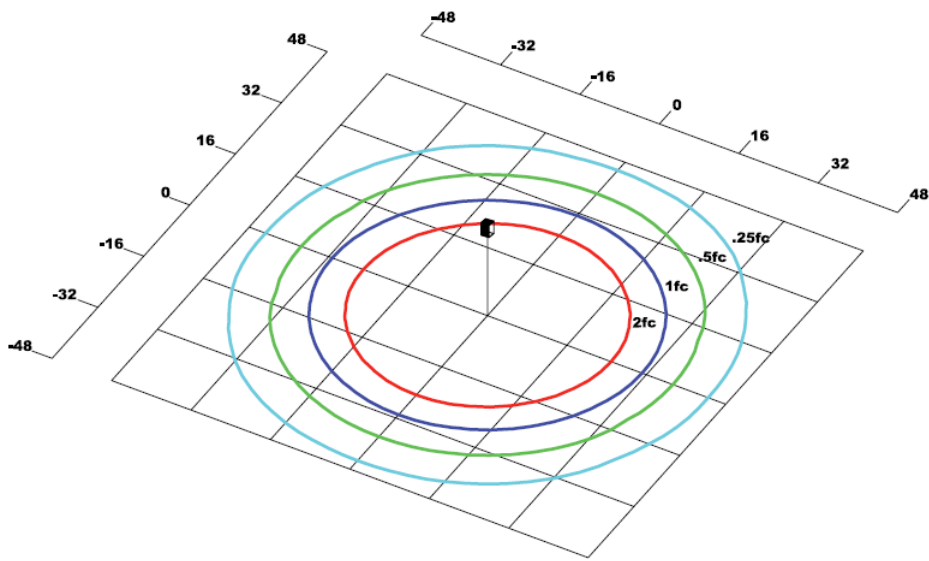

**VR11-Q-112L-QT-50K**  
**Mounting Height = 16ft**